

**CURNAMONA, S.A.
AIRBORNE GEOPHYSICAL SURVEY, 1995 -
OPERATIONS REPORT**

by

M. Bacchin

**Australian Geological Survey Organisation
Record 1997/1**

DEPARTMENT OF PRIMARY INDUSTRIES AND ENERGY

Minister for Resources: Senator The Hon. Warwick Parer
Secretary: Paul Barratt

AUSTRALIAN GEOLOGICAL SURVEY ORGANISATION

Executive Director: Dr. Neil Williams

© Commonwealth of Australia

ISSN: 1039–0073

ISBN: 0 642 25001 4

This work is copyright. Apart from any fair dealings for the purposes of study, research, criticism or review, as permitted under the Copyright Act, no part may be reproduced by any process without written permission. Copyright is the responsibility of the Executive Director, Australian Geological Survey Organisation. Inquiries should be directed to the **Information Officer, Australian Geological Survey Organisation, GPO Box 378, Canberra City, ACT, 2601.**

CONTENTS

SUMMARY

1. SURVEY AREA AND PARAMETERS	1
(i) Area Description	1
(ii) Survey Parameters.....	1
2. LOGISTICS	2
(i) Operating Base and Dates of Flying	2
(ii) Survey Aircraft and Field Crew	2
3. SURVEY EQUIPMENT	3
(i) Major equipment	3
(ii) Navigation	4
(iii) Magnetometer	5
(iv) Gamma-ray Spectrometer	5
(v) Altimeter	5
(vi) Barometer and Thermometer	6
(vii) Base Station Magnetometer	6
(viii) Aircraft Data Acquisition.....	6
4. CALIBRATION	7
(i) Compensation for the Magnetic Field of the Aircraft.....	7
(ii) Gamma-ray Spectrometer Calibration	7
5. DATA PROCESSING	8
(i) Data Checking and Editing	8
(ii) Flight Path Recovery.....	8
(iii) Magnetic Data Processing.....	9
(iv) Gamma-ray Spectrometer Data Processing.....	12
(v) Digital Elevation Model Data Processing.....	14
(vi) Final Products	16
REFERENCES	18

APPENDICES

APPENDICES

- A. Survey Area
- B. Flying Dates and Line Kilometres Flown
- C. Real time differential GPS
- D. Specifications of G833 Helium Magnetometer
- E. Specifications of RMS Instruments Automatic Aeromagnetic Digital Compensator
- F. Specifications of Gamma-ray Spectrometer Components
- G. Specifications of G866 and G833 Base Station Magnetometers
- H. Aircraft Data Acquisition System
- I. Compensation Results
- J. Gamma-ray Spectrometer Test Line Location
- K. The World Geodetic Datum
- L. Corrections to Differential GPS Navigation Data
- M. Geophysical Maps
- N. AGSO Archive Data, Grid and Magnetic Tape Format for Airborne Geophysical Data

SUMMARY

The Australian Geological Survey Organisation (AGSO) flew an airborne geophysical survey of 62 542 line km over Pasmore, Benagerie, Lake Charles, Kalabity and Mulyungarie 1:100 000 map Sheet areas on the Curnamona 1:250 000 map Sheet area in South Australia from April to June 1995. The area was flown as part of the Broken Hill Exploration Initiative, a National Geoscience Mapping Accord project implemented by AGSO, the New South Wales Department of Mineral Resources and the Department of Minerals and Energy South Australia.

The survey was flown at an altitude of 60m above ground level along east-west flight lines spaced 100 metres apart on the Kalabity and Mulyungarie 1:100 000 Sheet areas (southern Curnamona) and 400 metres apart on the Pasmore, Benagerie and Lake Charles 1:100 000 Sheet areas (northern Curnamona).

The total magnetic intensity, gamma-ray and digital elevation model data collected during the survey have been processed and are available for purchase, in both digital (point located data and gridded) and map form, from the Australian Geological Survey Organisation. Colour and greyscale pixel image maps are also available.

1. SURVEY AREA AND PARAMETERS

(i) Area Description

The Curnamona airborne survey covers part of the Pasmore, Lake Charles and Kalabity 1:100 000 map Sheet areas and the entire 1:100 000 map Sheet areas of Benagerie and Mulyungarie on the Curnamona 1:250 000 topographic map Sheet area in South Australia. The exact survey area is shown in Appendix A.

(ii) Survey Parameters

Altitude: clearance	60 m nominal terrain
Flight line direction:	East-West
Tie line direction:	North-South
Positioning Datum:	WGS84
Survey Line spacing:	

Northern Curnamona (Pasmore, Benagerie, Lake Charles)

Flight line spacing:	400 m
Tie line spacing:	4000 m

Southern Curnamona (Kalabity, Mulyungarie)

Flight line spacing:	100 m
Tie line spacing:	1000 m

Survey distance flown:

Northern Curnamona 400 m line spacing area

Lines:	12170 km
Ties:	1290 km
Total:	13460 km

Southern Curnamona 100 m line spacing area

Lines:	44320 km
Ties:	4762 km
Total:	49082 km

Total survey distance: 62 542 km

Sampling interval

Magnetics:	0.1 seconds (approx 7m)
Gamma-ray spectrometrics:	1.0 seconds (approx 67m)
GPS/Doppler/Altimeter:	1.0 seconds (approx 67m)
Barometric pressure/Temperature:	10.0 seconds (approx 670m)

2. LOGISTICS

(i) Operating Base and Dates of Flying

(a) Operating Base

Aircraft and crew were based at Broken Hill in NSW for the duration of the survey from 31 March to 8 June 1995.

(b) Flying Dates

A compensation flight for the magnetic field of the aircraft was flown on 4 April. Production flying commenced on 4 April and continued through to 8 June. Appendix B summarises flying days and distances flown.

(ii) Survey Aircraft and Field Crew

(a) Aircraft

Aero Commander 500 S "Shrike", VH-BGE

(b) Field Crew

Party Leaders:	Ross Franklin
	Mario Bacchin
Technicians:	Trevor Dalziell
	Beata Zygmunt
	Phil Doolan
Operators:	Lars Rickardsson
	Selwyn "Curly" Wilcox
Pilots:	Capt. John Biffin (Skywest Aviation)
	Capt. Murray Terwey (" ")

3. SURVEY EQUIPMENT

(i) Major Equipment

Magnetometer:	Geometrics G833 helium magnetometer
Compensator:	RMS Instruments Automatic Aeromagnetic Digital Compensator
Gamma-ray spectrometer:	Exploranium gamma-ray spectrometer consisting of a GR820 spectrum processor and two DET1024 spectrometer crystal detectors (33.56 l total)
Altimeter:	Collins ALT-50 radar altimeter
Barometer:	AGSO digital-Setra sensor
Thermometer:	AGSO digital-RS sensor
Navigation:	Ashtech XII "Ranger" GPS receivers and Ashtech "Ranger" differential processing software with a real time link between receivers using Philips 8010 radio transceivers
Doppler:	Racal (Decca) doppler antenna (80561 CAD) Sperry C 14 D compass
Video:	National colour video camera (WV CL 302E) National VCR (NV 180) National LCD TV (TCL 3A) National Time Date Generator (WJ 810)
Acquisition hardware:	HP-A400 computer, HP9122 720 Kb 3.5 inch dual floppy disc drive and HP Thinkjet printer Compaq Notebook and 120 Mb portable hard disc drive
Acquisition software:	AGSO-developed HP assembler language program

(ii) Navigation

(a) GPS Navigation System

Aircraft navigation was carried out using an Ashtech XII global positioning system (GPS). A receiver in the aircraft received range data from satellites every second and calculated the current latitude and longitude coordinates in the World Geodetic System 1984 (WGS84). The range data were recorded internally in the GPS receiver every five seconds. GPS corrections to the range data were applied after transmission in real time via a network of strategically placed transceivers. The real time method is described in Appendix C.

The calculated position of the aircraft was recorded on the aircraft acquisition system every second and was used to provide the pilot with aircraft guidance information on an LCD display.

To enable differential GPS post flight processing, a second GPS receiver was set up in AGSO's field office caravan as a GPS base station and internally recorded range data every five seconds. The base station supplied the real time corrections for the receiver in the aircraft.

The GPS data were post processed using Ashtech 'Ranger' software at the end of each flying day. The error in position of the post processed flight path data has been checked by flying a cloverleaf over AGSO's office caravan and is less than 5-10 metres.

The position of the base station GPS receiver was accurately determined by differential GPS surveying using as a fixed reference the trig site, "Round Hill" approximately 4 km northeast of Broken Hill.

The determined base station GPS coordinates (WGS 84) were:

Longitude	: 141° 28' 5.217270" E
Latitude	: 31° 59' 58.621220" S
Ellipsoidal height	: 297.426 m

(b) Doppler Navigation System

Doppler navigation data were used as a secondary navigation system for the aircraft. The doppler data were used as a back-up for the main navigation system (GPS) and to infill gaps (< 5 km) in the GPS data.

(c) Video Flight Path Recording

The aircraft's flight path was recorded on a VHS video system consisting of a National colour video camera with a wide angle lens, a National VCR and a National LCD TV. This system was also used for locating start and end positions for the gamma-ray spectrometer test lines.

(iii) Magnetometer

A Geometrics G833 helium magnetometer, with the sensor mounted in a boom attached to the rear of the aircraft, was used for the survey. The specifications of the magnetometer are summarised in Appendix D.

The recorded total magnetic field data were compensated in real time using an RMS Instruments automatic aeromagnetic digital compensator (AADC). The AADC compensates for the effects of aircraft motion and heading. The specifications of the AADC are summarised in Appendix E. Compensation procedures are described in Chapter 4.

The AADC low pass filters the total magnetic field intensity data using a second order 0.9 Hz recursive Butterworth filter. The filtered compensated total magnetic field intensity data were recorded on the aircraft acquisition system.

(iv) Gamma-ray Spectrometer

An Exploranium gamma-ray spectrometer, incorporating two DET1024 crystal detectors with a total volume of 33.56 litres, was used. The crystal gains were controlled by an Exploranium GR820 spectrum processor. Appendix F summarises the specifications of the gamma-ray spectrometer components.

Two hundred and fifty six channels of data between 0.0 MeV and 3.0 MeV were recorded every second. These data were recorded on a portable hard disk via a communications link between the HP-A400 computer acquisition system and a Compaq Notebook computer.

Additionally, five channels of data were recorded using the following window limits:

Total Count	0.41-2.81 MeV
Potassium	1.37-1.57 MeV
Uranium	1.66-1.86 MeV
Thorium	2.41-2.81 MeV
Cosmic	3.00 MeV and above

Total count, potassium, uranium and thorium counts were used for data checking during acquisition and the cosmic counts were used for background estimation and later data processing. A cumulative 256 channel spectrum between 0.0 MeV and 3.0 MeV was also recorded every 100 seconds. System live time (sample time - total dead time) was output with the data for later data processing.

(v) Altimeter

A Collins ALT-50 radar altimeter was used to measure ground clearance. The radar altimeter display indicates ground clearance from 0-2000 feet. The manufacturer's specifications claim a +/-2% accuracy for the ALT-50 system.

(vi) Barometer and Thermometer

Atmospheric temperature and pressure were measured using a digital barometer (Setra sensor) and digital thermometer (RS sensor). Although both of these units were built by the AGSO, the sensors were factory calibrated and no AGSO calibrations were performed.

(vii) Base Station Magnetometer

Initially daily variations of the Earth's magnetic field were monitored using a Geometrics G866 proton precession base station magnetometer, the specifications of which are given in Appendix G. The base station was set up in an area of shallow magnetic gradient, away from cultural influences and within telemetry range of AGSO's office caravan. Data from the base station were telemetered back to AGSO's field office caravan for display and recording on a Toshiba T1600 lap-top computer. The telemetry system used AGSO-built modems incorporating Phillips 828 UHF mobile radiotelephone transmit boards at a frequency of 471.8 MHz.

From 11 April 1995 in addition to the G866 proton precession base station magnetometer, a Geometrics G833 helium magnetometer was used to record the daily variation of the Earth's magnetic field. These data were recorded every one tenth of a second onto a Chicony 486 SLC laptop computer incorporating a GT100 universal counter card to calculate the magnetic field values and a Magellan OEM GPS module to synchronise the diurnal data with aircraft data.

Beginning 29 April 1995 the data from the G833 helium magnetometer base station were telemetered back to AGSO's field office caravan for display and recording on an Acer 486 PC.

Throughout the survey, base station telemetered data were recorded every twenty seconds during production flights.

The magnetometer base station acquisition programs and hardware were developed in-house at AGSO.

(viii) Aircraft Data Acquisition

The aircraft acquisition program and system were run using a HP-A400 computer with data recorded on 3.5 inch floppy discs using a HP9122 720 Kb disc drive. The one second multichannel spectra were recorded on a portable hard disk linked to the acquisition system through a Compaq Notebook computer.

The acquisition program was developed in-house at AGSO. Data are displayed in real time in the aircraft in analogue form on a HP Thinkjet printer. A schematic diagram of the aircraft's acquisition system is shown in Appendix H.

4. CALIBRATION

(i) Compensation for the Magnetic Field of the Aircraft

Compensation flights were flown in an area of low magnetic gradient prior to the start of the survey and after each aircraft service. They were flown at an altitude of 2800 m above sea level, approximately 90 kilometres north east of Broken Hill over an area between 142° 01' to 142° 10' E and 31° 13' to 31° 22' S.

The compensation flight procedure comprises a series of rolls($\pm 10^\circ$), pitches($\pm 5^\circ$) and yaws($\pm 5^\circ$) in the four cardinal headings to enable the AADC to calculate correction coefficients needed to remove aircraft manoeuvre noise. Each manoeuvre component was of 30 seconds duration.

The compensation manoeuvres were repeated after calculation of the coefficients to check the compensation quality. Prior to compensation the peak-to-peak noise was approximately 1 nT. Peak-to-peak noise during repeat manoeuvres and after the final compensation was 0.2 nT or less. On normal survey flights, noise levels from all sources were generally less than 0.1 nT peak-to-peak.

The AADC calculates basic statistics which reflect the degree of merit of the compensation. These include the standard deviation of the recorded data without corrections applied, the standard deviation with the corrections applied, the improvement ratio (the ratio of the standard deviation of the recorded data without and with the corrections applied) and the vector norm (the degree of difficulty in calculating the corrections). These statistics are given for all compensations in Appendix I.

(ii) Gamma-ray Spectrometer Calibration

The GR820 spectrum processor uses a sophisticated automatic control method to maintain crystal alignment while stabilising on naturally occurring isotopes (typically thorium). During operation the system continuously monitors and accumulates a separate spectra for each crystal detector. When the confidence level for the selected stabilisation peak (thorium) is exceeded, the peak channel of this isotope is computed, compared to the correct peak location, and the gain is then corrected. The gain for each crystal was corrected at least every 15 minutes.

Gamma-ray spectrometric test lines were flown at the beginning and end of each production flight. These lines were flown at survey altitude along a dirt road and lasted 150 seconds or approximately 10 kilometres. The location of the test lines used for the survey is shown in Appendix J.

Background corrections for gamma-ray spectrometrics are calculated using a full spectrum method (Minty, 1992).

After each flight, statistics were calculated from data recorded between fixed reference points, observed on video, along the test line. These statistics were recorded in spreadsheet form and compared with the preceding flights in order to detect any irregularities. In particular, the difference between the average in the total count channel for the most recently flown test line and the running average of all the previously flown test lines was analysed.

This value only rarely varied from +/- 10% well inside a +/- 15% variation which would be considered acceptable.

5. DATA PROCESSING

Flight path recovery, data checking and editing, and preliminary processing, gridding and imaging were performed at the survey base using the Geophysical Mapping Section's airborne data processing system, ARGUS. This preliminary processing was repeated in Canberra using the successor to ARGUS, the new INTREPID airborne geophysical data processing and visualisation system. Final magnetic, gamma-ray spectrometric and digital elevation model data processing were carried out using INTREPID.

(i) Data Checking and Editing

Data recorded on the aircraft acquisition system were transferred on a flight by flight basis to a hard disk in a Compaq SLT386s/20 laptop computer. This computer was networked to a Sun Sparcstation IPX and all aircraft data were transferred to the Sun hard drive to be edited, using AGSO-developed software, for missing values, noise, spikes or steps. All the recorded data were displayed for each survey line and any errors were interactively corrected. Anomalies arising from cultural influences, such as sheds, houses and fences, were usually not edited out. They were only edited out if they caused severe noise or caused the magnetometer to lose lock.

(ii) Flight Path Recovery

Range data which were recorded internally every five seconds on both GPS receivers were post-processed daily in the field using "Ranger" - an Ashtech proprietary program. "Ranger" calculates the corrected flight path (longitude, latitude and height) relative to the WGS84 reference ellipsoid.

At the end of each flying day the corrected longitude and latitude data calculated at five second intervals by "Ranger" were used to correct the GPS data which were recorded every one second on the aircraft acquisition system. As well as the standard "Ranger" corrections, other acquisition system specific corrections were applied. Position data were retained in the WGS84 coordinate system. The World Geodetic System 1984 (WGS84) coordinate system is defined in Appendix K. Taking the accuracy of the navigation data into account, the WGS84 system can be considered the same as the Geodetic Datum of Australia (GDA) for the survey data.

The full post processing correction procedure applied to the position data is described in Appendix L and is outlined below:

- (a) Position calculation delay correction.
- (b) Fiducial synchronisation correction.
- (c) "Ranger" corrections.
- (d) Low pass filter.

- (e) Reference navigation data to position of magnetometer sensor.
- (f) Doppler infill of gaps.

The fully corrected flight path was plotted each day to check the position of survey lines and their spacing. Navigation reflies were determined by the following criteria:

Line Spacing	Across Track Deviation	Distance along line
100 m	20 m	greater than 2 km
400 m	80 m	greater than 5 km

When both the across track deviation and along line distance were exceeded that portion of the survey line was reflown. This occurred very infrequently.

(iii) Magnetic Data Processing

Raw magnetic data were merged with the navigation data, and diurnal variation corrections were removed. The IGRF 1990 geomagnetic reference field, updated to 6 May 1995 and for an altitude of 140 m above sea level, which was estimated to be the mean survey altitude, was then subtracted from the data. The IGRF was calculated from the coefficients defined by the IAGA (1991). All magnetic values were adjusted by a constant so that the average residual magnetic field value was approximately 7000 nT.

The data were levelled using standard tie line levelling procedures. The steps involved in the tie line levelling were as follows.

- (a) Tie line 1060 was chosen as a reference tie.
- (b) All other ties were levelled to this tie line using degree three polynomial adjustments.
- (c) Lines were adjusted on a flight by flight basis to minimise the differences at line/tie crossover points, using degree three polynomial adjustments.
- (d) Finally the lines were adjusted individually to minimise crossover differences, using degree three polynomial adjustments.

The data were micro-levelled using the technique described by Minty (1991). For data over northern Curnamona which had 400 metre line spacing different filter characteristics were used from those over southern Curnamona which had 100 metre line spacing. Filter characteristics for the two areas are described below.

Northern Curnamona - 400 metre line spacing

These parameters apply only to data between the latitudes of 31° 00' S and 31° 14' S excluding the data between longitudes 140° 00' E and 140° 30' E.

- (a) Low pass filter in the flight line direction with a cut-off wavelength of 2000 metres.

- (b) High pass filter in the tie line direction with a cut-off wavelength of 800 metres.
- (c) Correction strings were low pass filtered with a cut-off wavelength of 400 metres before being applied to the line data. Adjustments were limited to lie between +/- 7.5 nT, (90% of the corrections fell in the range - 0.9 nT to + 0.9 nT).

These data were micro-levelled a second time using the technique described by Minty (1991). Filter characteristics are described below.

- (a) Low pass filter in the flight line direction with a cut-off wavelength of 2000 metres.
- (b) High pass filter in the tie line direction with a cut-off wavelength of 800 metres.
- (c) Correction strings were low pass filtered with a cut-off wavelength of 400 metres before being applied to the line data. Adjustments were limited to lie between +/- 2.5 nT, (90% of the corrections fell in the range - 0.525 nT to + 0.525 nT).

The following parameters apply only to data between the latitudes of 31° 14' S and 31° 30' S.

- (a) Low pass filter in the flight line direction with a cut-off wavelength of 2000 metres.
- (b) High pass filter in the tie line direction with a cut-off wavelength of 600 metres.
- (c) Correction strings were low pass filtered with a cut-off wavelength of 400 metres before being applied to the line data. Adjustments were limited to lie between +/- 7.5 nT, (90% of the corrections fell in the range - 0.18 nT to + 0.18 nT).

These data were micro-levelled a second time using the technique described by Minty (1991). Filter characteristics are described below.

- (a) Low pass filter in the flight line direction with a cut-off wavelength of 2000 metres.
- (b) High pass filter in the tie line direction with a cut-off wavelength of 600 metres.
- (c) Correction strings were low pass filtered with a cut-off wavelength of 400 metres before being applied to the line data. Adjustments were limited to lie between +/- 2.5 nT, (90% of these corrections were in the range - 0.419 nT to + 0.419 nT).

Southern Curnamona - 100 metre line spacing

- (a) Low pass filter in the flight line direction with a cut-off wavelength of 750 metres.
- (b) High pass filter in the tie line direction with a cut-off wavelength of 300 metres.
- (c) Correction strings were low pass filtered with a cut-off wavelength of 200 metres before being applied to the line data. Adjustments were limited to lie between +/- 7.5 nT, (90% of these corrections were within the range +/- 2.5 nT).

The data were micro-levelled a second time using the technique described by Minty (1991). Filter characteristics are described below.

- (a) Low pass filter in the flight line direction with a cut-off wavelength of 750 metres.
- (b) High pass filter in the tie line direction with a cut-off wavelength of 300 metres.
- (c) Correction strings were low pass filtered with a cut-off wavelength of 200 metres before being applied to the line data. Adjustments were limited to lie between +/- 5.0 nT, (90% of these corrections were within the range +/- 3.2 nT).

The micro-levelled data were gridded using the minimum curvature technique described by Briggs (1974). The grid cell size varied depending on line spacing. For northern Curnamona which had 400 m line spacing, an 80 m (3 sec) grid cell size was employed. For southern Curnamona which had 100 m line spacing, the grid cell size used was 20 m (0.75 sec). For the entire survey area combining both 400 m and 100 m line spacings an 80 m (3 sec) grid cell size was used.

(iv) Gamma-ray Spectrometer Data Processing.

A combination of full-spectrum and 3-channel processing was used to correct the gamma-ray spectrometric data. The multichannel spectra were deadtime corrected, energy calibrated and background corrected. The spectra were then integrated over the conventional 4-channel windows for subsequent stripping and height correction.

The energy calibration was affected by using the positions of prominent photopeaks in the sum spectrum for each line to obtain an estimate of the energy at channel one and the gain, keV per channel. (The sum spectrum is the accumulated one second spectra for each line). These parameters were then used to correct each spectrum in the line by resampling each channel to its correct energy range.

The three components of background were removed as follows:

(a) Aircraft and Cosmic Background

Aircraft and cosmic spectra for the AGSO aircraft were determined from high altitude calibration flights using the procedure described by Minty and Richardson (1989).

(b) Atmospheric Radon Background

A variation on the spectral ratio method described by Minty (1992) was used to remove radon background. The method is based on the observation that the low energy ^{214}Bi peak at 0.609 MeV from atmospheric radon suffers far less attenuation relative to the ^{214}Bi peak at 1.76 MeV than is the case for radiation from the ground. Thus the ratio of the counts in each of these photopeaks is diagnostic of the relative contributions of atmospheric radon and uranium in the ground to the observed spectrum.

The energy-calibrated and background-corrected spectra were then integrated over the conventional 4-channel windows. These 4-channel data were stripped (channel interaction correction) to correct for the Compton scattering of gamma-ray photons into lower energy

windows. Stripping ratios for the AGSO system were determined from calibration measurements over concrete calibration sources. The corrections were applied as follows:

$$\begin{aligned}N_{\text{TH}(\text{corrected})} &= N_{\text{TH}} \\N_{\text{U}(\text{corrected})} &= N_{\text{U}} - A * N_{\text{TH}(\text{corrected})} \\N_{\text{K}(\text{corrected})} &= N_{\text{K}} - B * N_{\text{TH}} - C * N_{\text{U}(\text{corrected})}\end{aligned}$$

where

$$\begin{aligned}N_{\text{TH}} &= \text{counts in the thorium channel} \\N_{\text{U}} &= \text{counts in the uranium} \\N_{\text{K}} &= \text{counts in the potassium channel} \\A &= 0.30987 + 0.00049 * \text{height} \\B &= 0.38308 + 0.00065 * \text{height} \\C &= 0.83815 + 0.00069 * \text{height}.\end{aligned}$$

The data were then height corrected to a nominal survey flying height of 60 m. Where the aircraft attained a height of 250 m or higher above the ground, 250 m was used to height correct in the total count, potassium and thorium channels. For the uranium channel, the maximum aircraft height used in the height corrections was 160 m.

The height corrections were made as follows:

$$N_{\text{corrected}} = N_{\text{uncorrected}} e^{-u(H-h)}$$

where

$$\begin{aligned}N_{\text{corrected}} &= \text{corrected counts} \\N_{\text{uncorrected}} &= \text{uncorrected counts} \\H &= \text{nominal flying height} \\h &= \text{measured flying height} \\u &= \text{attenuation coefficient}\end{aligned}$$

Attenuation coefficients for each channel are given below

$$\begin{aligned}u_{\text{total count}} &= 0.00785 \\u_{\text{potassium}} &= 0.00943 \\u_{\text{uranium}} &= 0.01150 \\u_{\text{thorium}} &= 0.00748\end{aligned}$$

Gamma-ray spectrometric data were levelled in much the same way as the magnetic data. Before levelling the data the associated longitude and latitude data were parallax corrected by adjusting the co-ordinates by -9.03 m. Prior to sampling the crossover points, a 5 point convolution filter with a cut-off wavelength of 350 m was passed over the data. Note that

these filtered data were only used for the crossover analysis and the final point located data have not been filtered.

The steps involved in tie line levelling were as follows.

- (a) Tie line 1060 was chosen as a reference tie.
- (b) All other ties were levelled to this tie using degree one polynomial adjustments (degree three for potassium data).
- (c) Lines were adjusted on a flight by flight basis to minimise the differences at line/tie crossover points, using degree one polynomial adjustments (degree three for potassium data).
- (d) Finally the lines were adjusted individually to minimise crossover differences, using degree one polynomial adjustments (degree three for potassium data).

The data were micro-levelled using the technique described by Minty (1991). For data over northern Curnamona which had 400 metre line spacing different filter characteristics were used from those over southern Curnamona which had 100 metre line spacing. Filter characteristics for the two areas are described below.

Northern Curnamona - 400 metre line spacing

DATA CHANNEL	CUT-OFF WAVELENGTH		CORRECTION RANGE CPS	90 % OF CORRECTION RANGE CPS
	LOW PASS FILTER METRES	HIGH PASS FILTER METRES		
Total Count	5000	1600	+/- 350.0	- 77.0 - + 92.0
Potassium	5000	1600	+/- 20.0	- 8.09 - + 8.22
Uranium	3500	1600	+/- 30.0	- 4.78 - + 5.45
Thorium	3500	1600	+/- 10.0	- 4.34 - + 4.64

Correction strings were low pass filtered with a cut-off wavelength of 400 metres (total count), 1000 metres (potassium and uranium) and 500 metres (thorium) before being applied to the line data.

Southern Curnamona - 100 metre line spacing

DATA CHANNEL	CUT-OFF WAVELENGTH		CORRECTION RANGE CPS	90 % OF CORRECTION RANGE CPS
	LOW PASS FILTER METRES	HIGH PASS FILTER METRES		
Total Count	2500	800	+/- 350.0	- 50.0 - + 56.0
Potassium	3500	800	+/- 20.0	- 6.18 - + 6.28
Uranium	1500	800	+/- 15.0	- 3.90 - + 4.00
Thorium	3500	800	+/- 10.0	- 2.69 - + 2.73

Correction strings were low pass filtered with a cut-off wavelength of 400 metres (total count and uranium), 500 metres (potassium and thorium) before being applied to the line data.

The total count data for southern Curnamona were micro-levelled a second time using the following parameters.

- (a) Low pass filter in the flight line direction with a cut-off wavelength of 2500 metres.
- (b) High pass filter in the tie line direction with a cut-off wavelength of 800 metres.
- (c) Correction strings were low pass filtered with a cut-off wavelength of 400 metres before being applied to the total count line data. Adjustments were limited to lie within the range +/- 225.0 cps of which 90 % fell within the range - 18.0 to + 20.0 cps.

The micro-levelled data were gridded using the minimum curvature technique described by Briggs (1974). The grid cell size varied depending on line spacing. For northern Curnamona which had 400 m line spacing, an 80 m (3 sec) grid cell size was employed. For southern Curnamona which had 100 m line spacing, a grid cell size of 20 m (0.75 sec) was used. For the entire survey area combining both 400 m and 100 m line spacings the grid cell size used was 80 m (3 sec).

(v) Digital Elevation Model Data Processing.

As described in Chapter 5 - Section (ii), range data recorded internally every five seconds on both GPS receivers were post-processed on a daily basis using "Ranger" - an Ashtech proprietary program. "Ranger" calculates the position of aircraft GPS receiver's antenna, including longitude, latitude and height relative to the WGS84 reference ellipsoid for each set of range data (every five seconds).

As in the case of the longitude and latitude data, the following acquisition system specific corrections, which are described in Appendix L, are applied to the height data:

- (a) Position calculation delay correction.
- (b) Fiducial synchronisation correction.

The corrected height data, which are relative to the WGS84 reference ellipsoid, are then linearly interpolated to one second samples (70 metres) and are merged with the longitude and latitude data.

A radar altimeter provided the aircraft's ground clearance, the altimeter data being sampled every one second.

The raw ground elevation data were then calculated as the difference between the height of the aircraft above the ellipsoid and the height of the aircraft above the ground. These raw elevation data calculated every one second (70 metres) are relative to the WGS84 reference ellipsoid - the ellipsoid being a horizontal datum.

Elevation data were levelled in much the same way as the radiometric data and the steps involved are described below. Before levelling the data the associated longitude and latitude data were parallax corrected by adjusting the co-ordinates by -11.4 metres.

- (a) Tie line 1060 was chosen as the reference tie.

- (b) All other ties were levelled to the reference tie using degree one polynomial adjustments.
- (c) Lines were adjusted on a flight by flight basis to minimise the differences at line/tie crossover points, using degree one polynomial adjustments.
- (d) Finally the lines were adjusted individually to minimise crossover differences, using degree one polynomial adjustments.

The data were micro-levelled using the technique described by Minty (1991). For data over northern Curnamona which had 400 metre line spacing, different filter characteristics were used from those over southern Curnamona which had 100 metre line spacing. Filter characteristics for the two areas are described below:

Northern Curnamona - 400 metre line spacing

- (a) Low pass filter in the flight line direction with a cut-off wavelength of 5000 metres.
- (b) High pass filter in the tie line direction with a cut-off wavelength of 1600 metres.
- (c) Correction strings were low pass filtered with a cut-off wavelength of 1000 metres before being applied to the line data. Adjustments were restricted to be in the range of +/- 10.0 metres (90% of the corrections were in the range -2.89 to +3.0 metres).

These data were micro-levelled a second time using the technique described by Minty (1991). Filter characteristics are described below:

- (a) Low pass filter in the flight line direction with a cut-off wavelength of 5000 metres.
- (b) High pass filter in the tie line direction with a cut-off wavelength of 1600 metres.
- (c) Correction strings were low pass filtered with a cut-off wavelength of 1000 metres before being applied to the line data. Adjustments were restricted to be in the range of +/- 5.0 metres (90% of the corrections were in the range -0.68 to +0.75 metres).

Southern Curnamona - 100 metre line spacing

- (a) Low pass filter in the flight line direction with a cut-off wavelength of 3000 metres.
- (b) High pass filter in the tie line direction with a cut-off wavelength of 1600 metres.
- (c) Correction strings were low pass filtered with a cut-off wavelength of 1000 metres before being applied to the line data. Adjustments were limited to lie between +/- 15.0 metres, (90% of these corrections were within the range - 2.53 to + 2.88 metres).

These data were micro-levelled a second time using the technique described by Minty (1991). Filter characteristics are described below:

- (a) Low pass filter in the flight line direction with a cut-off wavelength of 3000 metres.

- (b) High pass filter in the tie line direction with a cut-off wavelength of 1600 metres.
- (c) Correction strings were low pass filtered with a cut-off wavelength of 1000 metres before being applied to the line data. Adjustments were limited to lie between +/- 5.0 metres, (90% of these corrections were within the range - 0.59 to + 0.61 metres).

The next step is to convert the heights relative to the WGS84 ellipsoid to heights relative to the geoid. The geoid, which is defined as "the equipotential surface of the gravity field which best approximates mean sea level", is usually chosen as the datum to which heights plotted on maps are referred. The height of the geoid above the WGS84 ellipsoid is called the geoid-ellipsoid separation or N value.

Geoid-ellipsoid separation information for the area covered by The Broken Hill Airborne Survey were supplied by the Australian Surveying and Land Information Group (AUSLIG) in February 1996. The set of N values were supplied as a 10 minute of arc (approximately 18 km) grid. AUSLIG also provides a program "DINTER" which uses bilinear interpolation to calculate N values on a one minute of arc (approximately 1600 metres) grid. These values were then regridded using the new INTREPID imaging and data processing system to a cell size of 12.0 seconds of arc (approximately 320 metres). This grid of N values was then used to calculate correction strings to be subtracted from the elevation data. The correction strings were low pass filtered with a cut-off wavelength of 1000 metres before being applied to the point-located elevation data.

The elevation data were then corrected to account for the vertical separation between the antenna of the aircraft's GPS receiver, on the roof of the aircraft, and radar altimeter on the belly of the aircraft. This antenna separation distance of 1.675 metres was subtracted from the elevation data.

The micro-levelled data were gridded using the minimum curvature technique described by Briggs (1974). The grid cell size varied depending on line spacing. For northern Curnamona which had 400 m line spacing, an 80 m (3 sec) grid cell size was employed. For southern Curnamona which had 100 m line spacing, a grid cell size of 20 m (0.75 sec) was used. For the entire survey area combining both 400 m and 100 m line spacings the grid cell size used was 80 m (3 sec).

(vi) Final Products

- (a) Standard AGSO geophysical maps

An AGSO standard set of geophysical maps have been produced at scales of 1:250 000, 1:100 000, 1:50 000 and 1:25 000. Flight path, TMI profiles and contour maps were produced using the INTREPID processing system. The standard set of maps produced are shown in Appendix M.

- (b) Digital Data

Final processed point-located data and grids were archived in the standard AGSO ARGUS format, on exabyte magnetic tape cartridges, magneto-optical discs and Compact Discs in ASCII format (Appendix N).

(c) Pixel Image Maps

Additional to the standard AGSO geophysical maps listed in Appendix M, pixel image maps have been compiled using the method described by Milligan and others (1992). The following pixel image maps have been released.

- (1) Colour 1:100 000 scale of the first vertical derivative of the total magnetic intensity (reduced to the pole) with north-westerly illumination covering the Mulyungarie and Kalabity 1:100 000 map Sheet areas.
- (2) Greyscale 1:100 000 scale of the first vertical derivative of the total magnetic intensity (reduced to the pole) with north-easterly illumination covering the Mulyungarie and Kalabity 1:100 000 map Sheet areas..
- (3) Greyscale 1:100 000 scale of the first vertical derivative of the total magnetic intensity (reduced to the pole) with north-westerly illumination covering the Mulyungarie 1:100 000 map Sheet area.
- (4) Colour 1:250 000 scale of the total magnetic intensity (reduced to the pole) with north-easterly illumination covering the Curnamona 1:250 000 map Sheet area.
- (5) Greyscale 1:250 000 scale of the first vertical derivative of the total magnetic intensity (reduced to the pole) with north-easterly illumination covering the Curnamona 1:250 000 map Sheet area.

References

Briggs, I.C., 1974 - Machine contouring using minimum-curvature. *Geophysics*, **39**, 39-48.

Grasty, R. L., 1975 - Uranium measurements by airborne gamma-ray spectrometry. *Geophysics*, **40**, 503-519.

International Association of Geomagnetism and Aeronomy, 1991 - Division V Working Group 8. International Geomagnetic Reference Field, 1991 Revision. *Journal of Geomagnetism and Geoelectricity*, **43**, 1007-1012.

International Atomic Energy Agency, 1991 - Airborne Gamma Ray Spectrometer Surveying. *International Atomic Energy Agency Technical Reports Series Number 323*, IAEA Vienna.

Milligan, P. R., Morse, M. P., and Rajagopalan, S., 1992 - Pixel map preparation using the HSV colour model. *Exploration Geophysics*, **23**, 219-224.


Minty, B. R. S., Morse, M. P., and Richardson, L. M., 1990 - Portable calibration sources for airborne gamma-ray spectrometers. *Exploration Geophysics*, **21**, 187-195.

Minty, B. R. S., 1991 - Simple micro-levelling for aeromagnetic data. *Exploration Geophysics*, **22**, 591-592.



Minty, B. R. S., 1992 - Airborne gamma-ray spectrometric background estimation using full spectrum analysis. *Geophysics*, **57**, 279-287.

Minty, B. R. S., and Richardson, L. M., 1989 - Calibration of the BMR airborne gamma-ray spectrometer upward-looking detector, February 1989. *Bureau of Mineral Resources, Australia, Record 1989/8*.

APPENDIX A SURVEY AREA

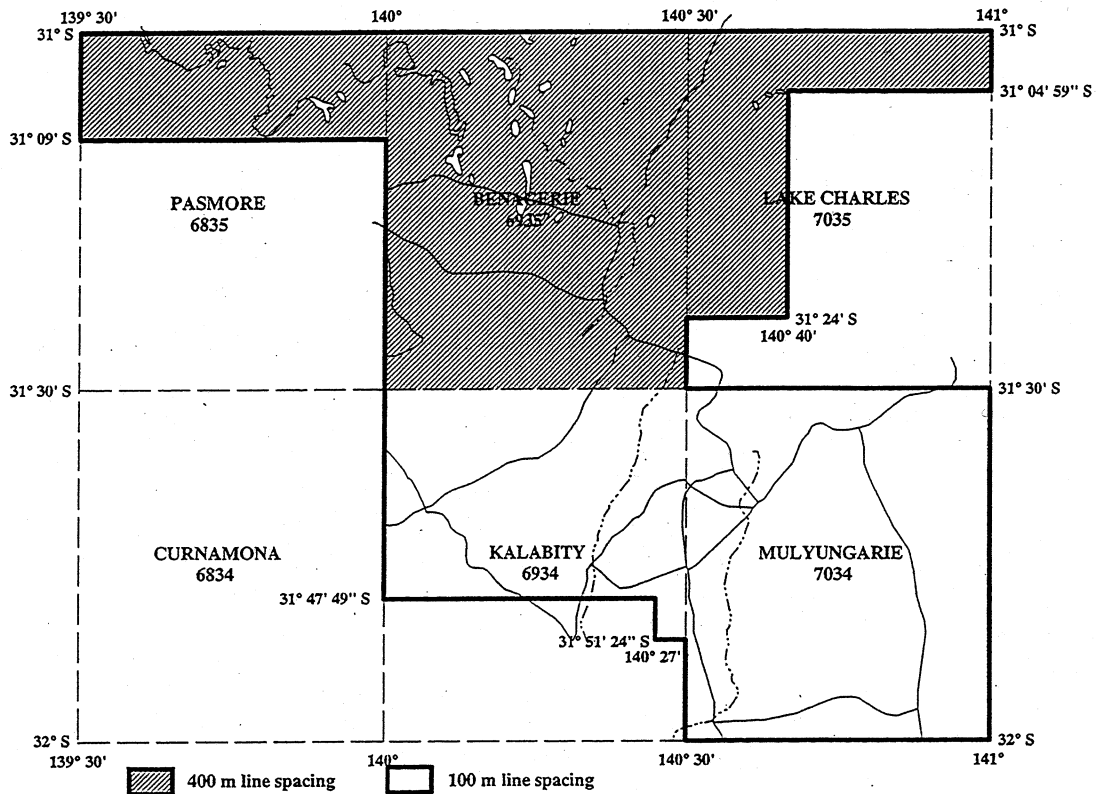

AIRBORNE SURVEY CURNAMONA 1995 P628

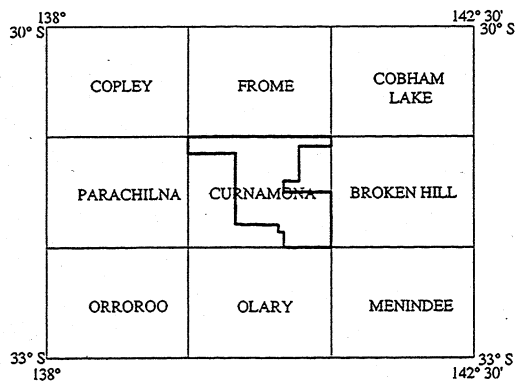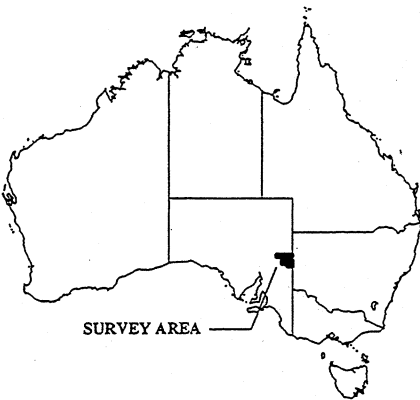

APPENDIX B-1

Flying Dates and Line Kilometres Flown

DATE	FLIGHT NUMBER	COMMENTS	LINE / TIE KILOMETRES
31/3/95		Ferry from Tamworth to Broken Hill	0
4/4/95	178	Compensation flight	0
4/4/95	179	First production flight	600
5/4/95	180	Operations normal	790
5/4/95	181	GPS problems	0
5/4/95	182	Operations normal	600
6/4/95	183	Operations normal	760
6/4/95	184	Operations normal	885
7/4/95	185	Operations normal	790
7/4/95	186	Operations normal	600
8/4/95	187	Operations normal	790
8/4/95	188	Operations normal	885
9/4/95	189	Operations normal	790
9/4/95	190	Operations normal	850
11/4/95	191	Operations normal	870
11/4/95	192	Operations normal	870
12/4/95	193	Operations normal	765
12/4/95	194	Operations normal	849
13/4/95	195	Operations normal	828
13/4/95	196	Operations normal	521
14/4/95	197	Operations normal	711
14/4/95	198	Operations normal	786
15/4/95	199	Equipment problems	0
15/4/95	200	Operations normal	585
15/4/95	201	Operations normal	615
16/4/95	202	Operations normal	615
16/4/95	203	Operations normal	778
18/4/95	204/5	Operations normal	696
19/4/95	206	Operations normal	906
20/4/95	207	Operations normal	779
20/4/95	208	Operations normal	779
21/4/95	209	Operations normal	650
21/4/95	210	Operations normal	626
22/4/95	211	Operations normal	873
22/4/95	212	Operations normal	695
23/4/95	213	Operations normal	986
23/4/95	214/5	Operations normal	795
24/4/95	216	Operations normal	570
24/4/95	217	Operations normal	890
25/4/95		Ferry to Melbourne for service	0
28/4/95		Ferry to Canberra after service	0
29/4/95		Ferry to Broken Hill	0
29/4/95	218	Compensation abandoned – alternator problem	0
29/4/95	219	Compensation abandoned – alternator problem	0
2/5/95	220	Compensation # 2	0
4/5/95	221	Operations normal	460
5/5/95	222	Operations normal	604

APPENDIX B-2

Flying Dates and Line Kilometres Flown

DATE	FLIGHT NUMBER	COMMENTS	LINE / TIE KILOMETRES
5/5/95	223	Operations normal	890
6/5/95	224	Operations normal	890
6/5/95	225	Operations normal	945
7/5/95	226	Operations normal	945
7/5/95	227	Operations normal	945
8/5/95	228	Operations normal	945
8/5/95	229	Operations normal	945
9/5/95	230	Flight abandoned – rain	0
11/5/95	231	Operations normal	945
12/5/95	232	Operations normal	788
12/5/95	233	Operations normal	788
15/5/95	234	Operations normal	220
15/5/95	235	Operations normal	945
16/5/95	236	Operations normal	765
17/5/95	237	Operations normal	945
18/5/95	238	Operations normal	788
18/5/95	239	Operations normal	788
19/5/95	240	Operations normal	945
19/5/95	241	Operations normal	945
20/5/95	242	Operations normal	945
20/5/95	243	Operations normal	945
21/5/95	244	Operations normal	945
21/5/95	245	Operations normal	945
22/5/95	246	Operations normal	945
23/5/95	247	Operations normal	945
23/5/95	248	Operations normal	945
24/5/95	249	Operations normal	945
25/5/95	250	Operations normal	978
25/5/95	251	Operations normal	788
26/5/95	252	Operations normal	978
27/5/95	253	Operations normal	978
28/5/95		Ferry to Albury	0
29/5/95	254	Spectrometer test line calibration	0
29/5/95		Ferry to Melbourne for service	0
31/5/95		Ferry to Broken Hill after service	0
1/6/95	255	Compensation # 3	0
1/6/95	256	Operations normal	978
2/6/95	257	Operations normal	788
2/6/95	258	Operations normal	978
3/6/95	259	Operations normal	978
4/6/95	260	Operations normal	978
5/6/95	261	Operations normal	788
5/6/95	262	Operations normal	978
6/6/95	263	Operations normal (all refly lines)	0
7/6/95	264	Operations normal	788
8/6/95	265	Operations normal	788
8/6/95	266	Operations normal	409

APPENDIX B-3

Flying Dates and Line Kilometres Flown

DATE	FLIGHT NUMBER	COMMENTS	LINE / TIE KILOMETRES
------	------------------	----------	--------------------------

Total line/tie kilometres flown			62 542
---------------------------------	--	--	--------

Summary

Productive survey flights	113
Unproductive survey flights	16
Total flights in survey	129

Unproductive survey flights consisted of:

Aircraft ferries	7
Compensation flights	3
Test flights	1
Abandoned flights	
Weather	1
Equipment	4

APPENDIX C REAL TIME DIFFERENTIAL GPS

Real time differential GPS navigation is a method used to improve navigation accuracy. Line tracking using this method is more precise than by the single GPS receiver method thus allowing a pilot to fly an aircraft at line spacings of 100 m.

The navigation equipment used for this 100 m and 400 m line spacing survey consisted of two Ashtech XII GPS receivers; one in the field office caravan (base) located at a known position at the Broken Hill airport, and the other in the aircraft. The two identical GPS receivers were configured to run in differential mode.

The base station GPS calculated satellite range corrections which were transmitted to the aircraft by a UHF radio link. The base radio transmitter was a Philips PRM 8010 UHF radio, transmitting at 5 watts power through a UHF colinear antenna mounted about 5 meters above ground level.

The radio in the aircraft was a Philips PRM 8030 transceiver with a "voting" facility, which enables the receiver to search out and lock onto the strongest signal available. The receiving antenna in the aircraft was a ground-plane independent type, mounted on the top of the tail.

To extend the range of operation, two repeater stations for the telemetry system were used each incorporating a pair of Philips PRM 8010 radios. The receiving antenna for each repeater was a nine element Yagi aimed at the base transmitter, while the transmitting antenna was a colinear type mounted about 5 metres above the ground. One repeater was situated at Mt. Robe which is approximately 472 metres asl. The second repeater was situated at Nancatee Hill which is approximately 206 metres asl on the Curnamona sheet area to the west of Broken Hill. The distance from the caravan to Mt Robe was approximately 40 km. The distance from the caravan to Nancatee Hill was approximately 110 km.

The transmission frequencies for the network were:

Tx from caravan.....471.650 MHz.

Tx from Mt Robe repeater494.825 MHz.


Tx from Nancatee Hill repeater485.150 MHz.

The modems used to interface between the GPS receivers and the radios at the base station and in the aircraft were AGSO designed units incorporating TCM3105 chips operating at 1200 baud.

APPENDIX D

Specifications – G833 Helium Magnetometer

Operating range:	20,000 to 95,000 nT
Temperature:	-20 to +50 °C
Sensitivity:	0.0032 nT/root Hz RMS
Bandwidth:	350 Hz (-3dB point)
Loop scan rate:	1000 cycles/second
Input power:	28 V DC, 6 A max
Output signal:	At Helium gyromagnetic frequency, approximately 28.02468 Hz/nT. 3 volts peak to peak
Dimensions:	Sensor cell - 80 mm diameter x 145 mm length Scan processor - 270 x 120 x 85 mm Control panel - 48.26 cm rack mount
Weight:	approximately 6 kg

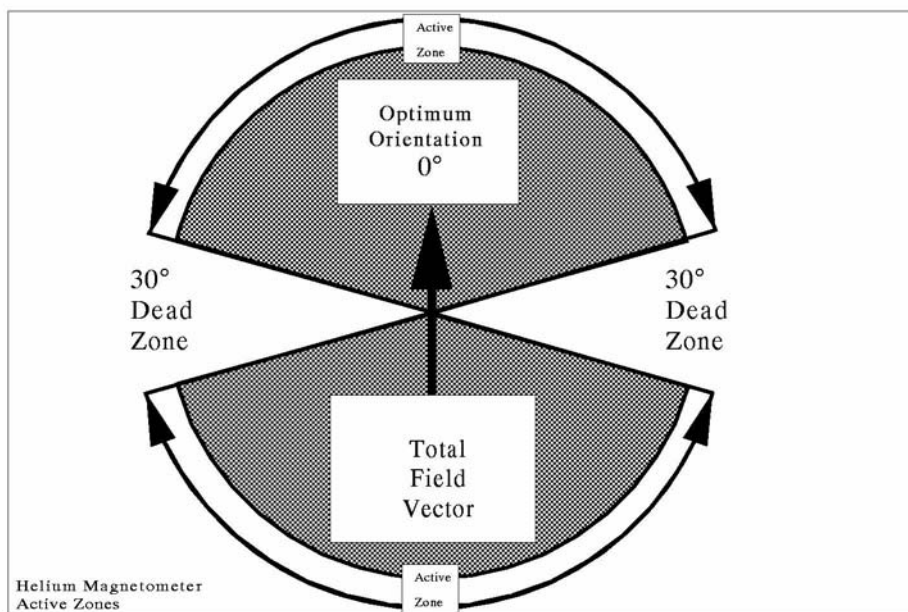

APPENDIX E-1

Specifications - RMS Instruments Automatic Aeromagnetic Digital Compensator

INPUTS:	one or two high sensitivity magnetometers of optical absorption type.
INPUT FREQUENCY RANGE:	70 kHz – 350 kHz – Cs sensor 140 kHz – 700 kHz – K sensor 560 kHz – 2800 kHz – He sensor 850 Hz – 4260 Hz – Overhauser
MAGNETIC FIELD RANGE:	20,000 – 100,000 nT
RESOLUTION:	1 pT (picoTesla)
COMPENSATION PROCEDURE:	improvement ratio 10 – 20 typical for total field improvement ratio 20 – 100 typical for gradient
ACCURACY OF COMPENSATION:	0.035 nT standard deviation for the entire aircraft flight envelope in the bandwidth 0 – 1 Hz typical
DATA OUTPUT RATE:	10 Hz
SYSTEM FREQUENCY RESPONSE:	0 – 0.9 Hz
INTERNAL SYSTEM NOISE:	less than 2 pT (standard deviation in the bandwidth 0 – 1 Hz)
DURATION OF CALIBRATION: FLIGHT MANOEUVRES	5 – 8 minutes typical
VECTOR MAGNETOMETER:	Develco Model 9202–02 (3-axis fluxgate)
MICROCOMPUTER:	SBC-11/21 Plus (DEC) Front End LSI–11/73 (DEC) Main CPU
KEYBOARD:	limited alphanumeric
DISPLAY:	green fluorescent, 80 character self scan panel
OUTPUTS:	serial data communication port: RS232C – max. rate 19.2 K Baud parallel output port: 16 bit with full handshaking (DRV11–J) (optional)

APPENDIX E-2

Specifications - RMS Instruments Automatic Aeromagnetic Digital Compensator

POWER: 28 +/- 4 VDC, 5A, 150 W (for single magnetometer)
7A, 196 W (for gradiometer system)

ENVIRONMENTAL:

OPERATING TEMPERATURE: 0 to 50 degrees C

STORAGE TEMPERATURE: -20 to 55 degrees C

RELATIVE HUMIDITY: 0 – 99%, non-condensing

ALTITUDE: 0 – 6000 m

PHYSICAL DATA:

console dimensions: 483 x 178 x 440 mm

console weight: 12.5 kg

power supply dimensions: 225 x 180 x 220 mm

power supply weight: 5.5 kg

APPENDIX F-1
SPECIFICATIONS - GR820 SPECTROMETER SYSTEM

A. Detector Controller

- Maximum number of crystals - 16. Each crystal has individual pole-zero cancellation, semi-gaussian shaping and advanced base line restoration circuitry.
- Continuous, individual-crystal spectrum analysis ensures that optimum system stabilization is achieved. Resolution is calculated by a sophisticated gaussian curve fitting algorithm to perform an accurate centroid analysis of the selected stabilization peak.
- High energy cosmic pulses are accumulated in a separate channel.
- Accurate pile-up rejection for simultaneous pulses allows qualitative gamma-ray spectrum analysis almost independent of the system count rate. Special circuitry analyses for pulse pile-up and permits only detector signals from single events to be analysed. Simultaneous events in adjacent crystals are added to reduce the Compton effect.
- Residual pulse pile-up at 100,000 counts/sec are less than 2%.

B. Analog to digital converter (ADC)

- 50 MHz Wilkinson ramp ADC.
- Linearity - integral - less than 0.2% - differential - less than 1%.
- Average system dead-time is less than 5 usec/pulse.
- Live-time channel records the actual system live-time. This data is output with the digital data which allows post correction for system dead-time to an accuracy of 0.1%.
- Number of channels - selection of 256 channels or 512 channel operation.
- Maximum number of counts/channel - 65,535 (16 bits).
- The lower threshold - manually selectable from channel 2 to channel 50 (20-500 keV).
- The upper threshold is set to 3 MeV. All pulses above 3 MeV are accumulated in the cosmic channel as a direct measure of cosmic ray activity.
- ADC offset set from the keyboard.
- The maximum input count rate is 100,000 counts/second.

APPENDIX F-2 SPECIFICATIONS - GR820 SPECTROMETER SYSTEM

C. System outputs

- Visual display - the front panel display is a 640x200 electroluminescent (EL) high contrast graphics display which allows full spectrum display, system set-up and various parameter monitoring functions. In the spectrum display mode, the region of interest and cursor may be viewed by channel number or directly in keV.
- The internal channel number to energy level (keV) conversion table compensates for non-linearity of the detector's light output.
- The front panel has a 21 button keyboard for easy operator control.
- The system's operation is fully menu driven.
- Digital outputs
 - RS-232 port (1200 to 19200 baud).
 - IEEE-488 bus output - talk listen/talk only.
 - Geometrics GR-800 output format.
 - Some system functions can be controlled remotely by an external computer via the RS-232 and the IEEE-488 digital ports.
- Analog output
 - 4 channels of ROI data can be selected for output on the analog port. The outputs have 10 bit resolution (0-10V). Scaling can be set from the keyboard (100-50K counts/sec FSD) and output data may be raw or stripped using internally stored calibration constants. Analog output wraps at fsd limits and is dead-time corrected.

D Miscellaneous

- Regions of interest (ROI) 8 ROIs can be selected. The upper and lower thresholds can be individually set over the entire spectrum range.
- The first 4 ROIs are available for digital and analog output. The second 4 ROIs are available only for digital output on the RS-232 or the IEEE-488 ports.
- System resolution. Detector resolution is automatically computed for each (and summed crystals) during peak analysis and is displayed for operator monitoring when required. The summed down resolution is also output on the data stream.

System test. At power on, a full system test of all internal pcb handshaking is performed. Included in the testing is the lithium back-up battery, the system ram memory, display handshaking, the systems configuration (options installed), the selected detectors (checked via ADC analysis) and peripheral handshaking response.

APPENDIX F-3

SPECIFICATIONS - GR820 SPECTROMETER SYSTEM

- Configuration menus. The configuration menus allow the selection of the number of detectors in use, confidence levels for gain analysis, maximum crystal resolution levels for each detector (with operator warning if levels exceeded), output configurations for analog and digital data and various special display/monitoring functions.
- Maintenance. A set of special menus allows the user to test and calibrate many system functions including system test, ADC offset, low level discriminator etc.
- Power : 28V - 1.25 amps

E. Detectors

The crystals are housed in a specially designed hi-impact polystyrene cases using low background materials for minimum signal attenuation. Full thermal and internal shock protection allows the units to be directly mounted to the floor. A very low noise, high voltage power supply is housed in each pack so high voltage is not present in the connecting cables. A unique preamplifier with special processing for signal optimization is used. The GPX-1024 has 4 crystals with a total volume of 16.78 litres

- Outputs. Individual BNC connectors output each crystal's signal separately.
- Size : GPX-1024 : 73x51x30 cms)
- Weight : GPX-1024 : 84 kg
- Power : 28 V @ 0.5 A/crystal pack
- Temperature limitations
 - Closed pack : storage -40 to +60, operation -40 to +60 deg. C
 - Open pack : not recommended
- Temperature gradient
 - Closed pack : -40 to +50 (instantaneous)
 - Open pack : a change of 1 deg. C/hr.

APPENDIX G-1

SPECIFICATIONS - G866 BASE STATION MAGNETOMETER

Display: Six-digit, seven segment, numeric display of magnetic field with 0.1 nT resolution. Same display used to set or view time-of-day and date, signal strength, battery voltage, and variables.

Resolution: Varies from 0.1 to 1 nT depending on sample interval. 1 nT for 0.5 to 0.9 second, 0.5 nT for 1.0 to 1.7 seconds, 0.2 nT for 1.4 to 2.9 seconds, and 0.1 nT for 3.0 or more seconds.

Accuracy: 0.5 nT.

Controls: Pressure-sensitive keyboard to control operation and to select variables. All control clock settings are stored in non-volatile memory, powered by lithium battery.

Clock: Julian clock with stability of 5 seconds per month at room temperature and 5 seconds per day over a temperature range of -20 to +50 degrees Celsius.

Tuning: Push-button tuning from keyboard. Current tuning value displayed on request. Tuning range is from 20,000 to 90,000 nT.

Gradient Tolerance: Tolerates gradients to 5000 nT/metre. When high gradients reduce signal quality, a partial reading is maintained at a resolution consistent with implied accuracy.

Sample Interval: Push-button selection of sample interval from 0.5 to 999.9 seconds. Resolution of 0.1 seconds.

Manual Read: Readings may be initiated by a front panel push-button.

External Cycling: Can be initiated by external cycling device.

Recorder: Electrosensitive recorder producing permanent records insensitive to heat, cold, sunlight or age. Chart width approximately 10 cm with the following formats available.

Narrow: Approximately one half of chart is an analog representation of every reading formed from closely connected dots in two overlapping scales. Remainder of chart is a numerical listing of periodic reading (eg., every ninth reading) and time.

Wide Analog: The printed table may be deleted and the analog scale expanded when a high resolution analog chart is the preferred format (eg., in magnetic search).

Variable "Chart Speed": Simulates changes in chart speed by varying time-axis spaces between plotted readings.

APPENDIX G-2

SPECIFICATIONS - G866 BASE STATION MAGNETOMETER

Recorder Scale: Four, push-button selected scales of 10/100, 20/200, 50/500 or 100/1000 nT full scale. The analog records are dual range, as though there were two overlapping pens recording at different scale factors. The scales overlap by 20% with hysteresis so that there is no jitter at the scale edges.

Event Mark: A front panel push button or external input will cause an extra mark to be added for identification of special events.

Paper Feed: Advances paper rapidly for loading and unloading paper. Also causes the printer to annotate the record with sensitivity, scale factors, sample interval and date.

Special Functions: Internal switch, accessible by hinging up the front panel, allows selection of variations in operation:

- (a) Vary "chart speed" (see recorder).
- (b) Narrow chart (see recorder).
- (c) Wide analog chart (see recorder).
- (d) Power conservation. Display will automatically shut off 7 seconds after a reading has been taken, or two minutes after a key has been depressed.
- (e) 3-point running average (smooths data by taking running average).
- (f) 5-point running average (smooths data by taking running average).
- (g) 7-point running average (smooths data by taking running average).
- (h) Control disable (disable all front panel controls which might be used to modify the stored parameters, prevents operator errors), saves power.

Outputs: (1) BCD character serial output of time, day and field readings for use with external digital recorder. (Also outputs suitable handshaking signals for interfacing.) and (2) RS-232-C compatible ASCII output of time, day, and field reading: followed by a carriage return and line feed at three selectable baud rates (110, 300, 9600). This output is for an external printer or computer-based acquisition system.

APPENDIX G-3

SPECIFICATIONS - G833 HELIUM BASE STATION MAGNETOMETER

Operating range:	20,000 to 95,000 nT
Temperature:	-20 to +50 °C
Sensitivity:	0.0032 nT/root Hz RMS
Bandwidth:	350 Hz (-3dB point)
Loop scan rate:	1000 cycles/second
Input power:	28 V DC, 6 A max
Output signal:	At He gyromagnetic frequency, approximately 28.02468 Hz/nT. Three volts peak to peak
Dimensions:	Sensor cell – 80 mm diameter x 145 mm length Scan processor – 270 x 120 x 85 mm Control panel – 49.26 cm rack mount
Weight:	approximately 6 kg

APPENDIX G-4

SPECIFICATIONS - MAGELLAN OEM GPS MODULE

Operational Characteristics

Position Update Rate:	1 second continuous (approximate)
Time to First Fix	
Warm Start:	30 seconds (approximate)
(with almanac/date/time/initial position and ephemeris < 2 hours old)	
Cold Start:	75 seconds 2D/3D (9 approximate)
(with almanac/date/time/initial position)	
Autonomous start:	5 – 12 minutes typical
(no almanac/ephemeris/date/time/initial position)	

Position Accuracy *

(HDOP < 2, Cno > 47 db-Hz, 2D)

Horizontal Position:	25 metres RMS in 2D
	30 metres RMS in 3D
Vertical Position:	50 metres RMS

* with Selective Availability disabled – note that selective availability was operating during the survey.

Electrical Characteristics

Power:	
OEM/PS:	9 – 16 VDC
	235 mA at 12 VDC typical, 250 mA max
OEM/5V:	5 VDC +/- 0.2 VDC
	170 mA
Interfaces:	RS232
Baud Rates:	Jumper - selectable 1200, 2400, 4800, or 9600
Receiver Type:	4 channels dedicated to tracking satellites
	1 channel dedicated to tracking all other satellites in the sky

Firmware Functions

Timing:	Timing pulse ON/OFF
	UTC or GMT reference
	Time only mode
	Single satellite timing default all modes
	Hour, minute, second, day, month, year
	Status indicator
	Satellites in solution
	Signal quality

OEM Antenna: Active Quadrifilar Helix

APPENDIX G-5

SPECIFICATIONS - GT100 UNIVERSAL COUNTER

Input Characteristics

Channels A and B

Frequency Range:	DC to 100 MHz
Signal Operating Range:	+5 V to -5 V
Sensitivity:	Sinewave 25 mV RMS Dc to 20 MHz
	50 mV RMS 20 MHz to 50 MHz
	160 mV RMS 50 MHz to 100 MHz
Pulse	450 mV pk-pk at 5 ns pulse width

Measurement Functions


Resolution (in Hz):	+/- LSD +/- Freq *1.4 *Trigger Error/Gate time
Accuracy (in Hz):	+/- Resolution +/- Time Base Error

General

Compatibility:	1 full size slot in any PC/XT, PC/AT or compatible, using DOS 3.0 or higher. Compatible with any programming language.
Time Base:	Standard 10 MHz Crystal Oscillator Accuracy +/- 100 ppm (0.01 %)

APPENDIX H

Aircraft Acquisition System

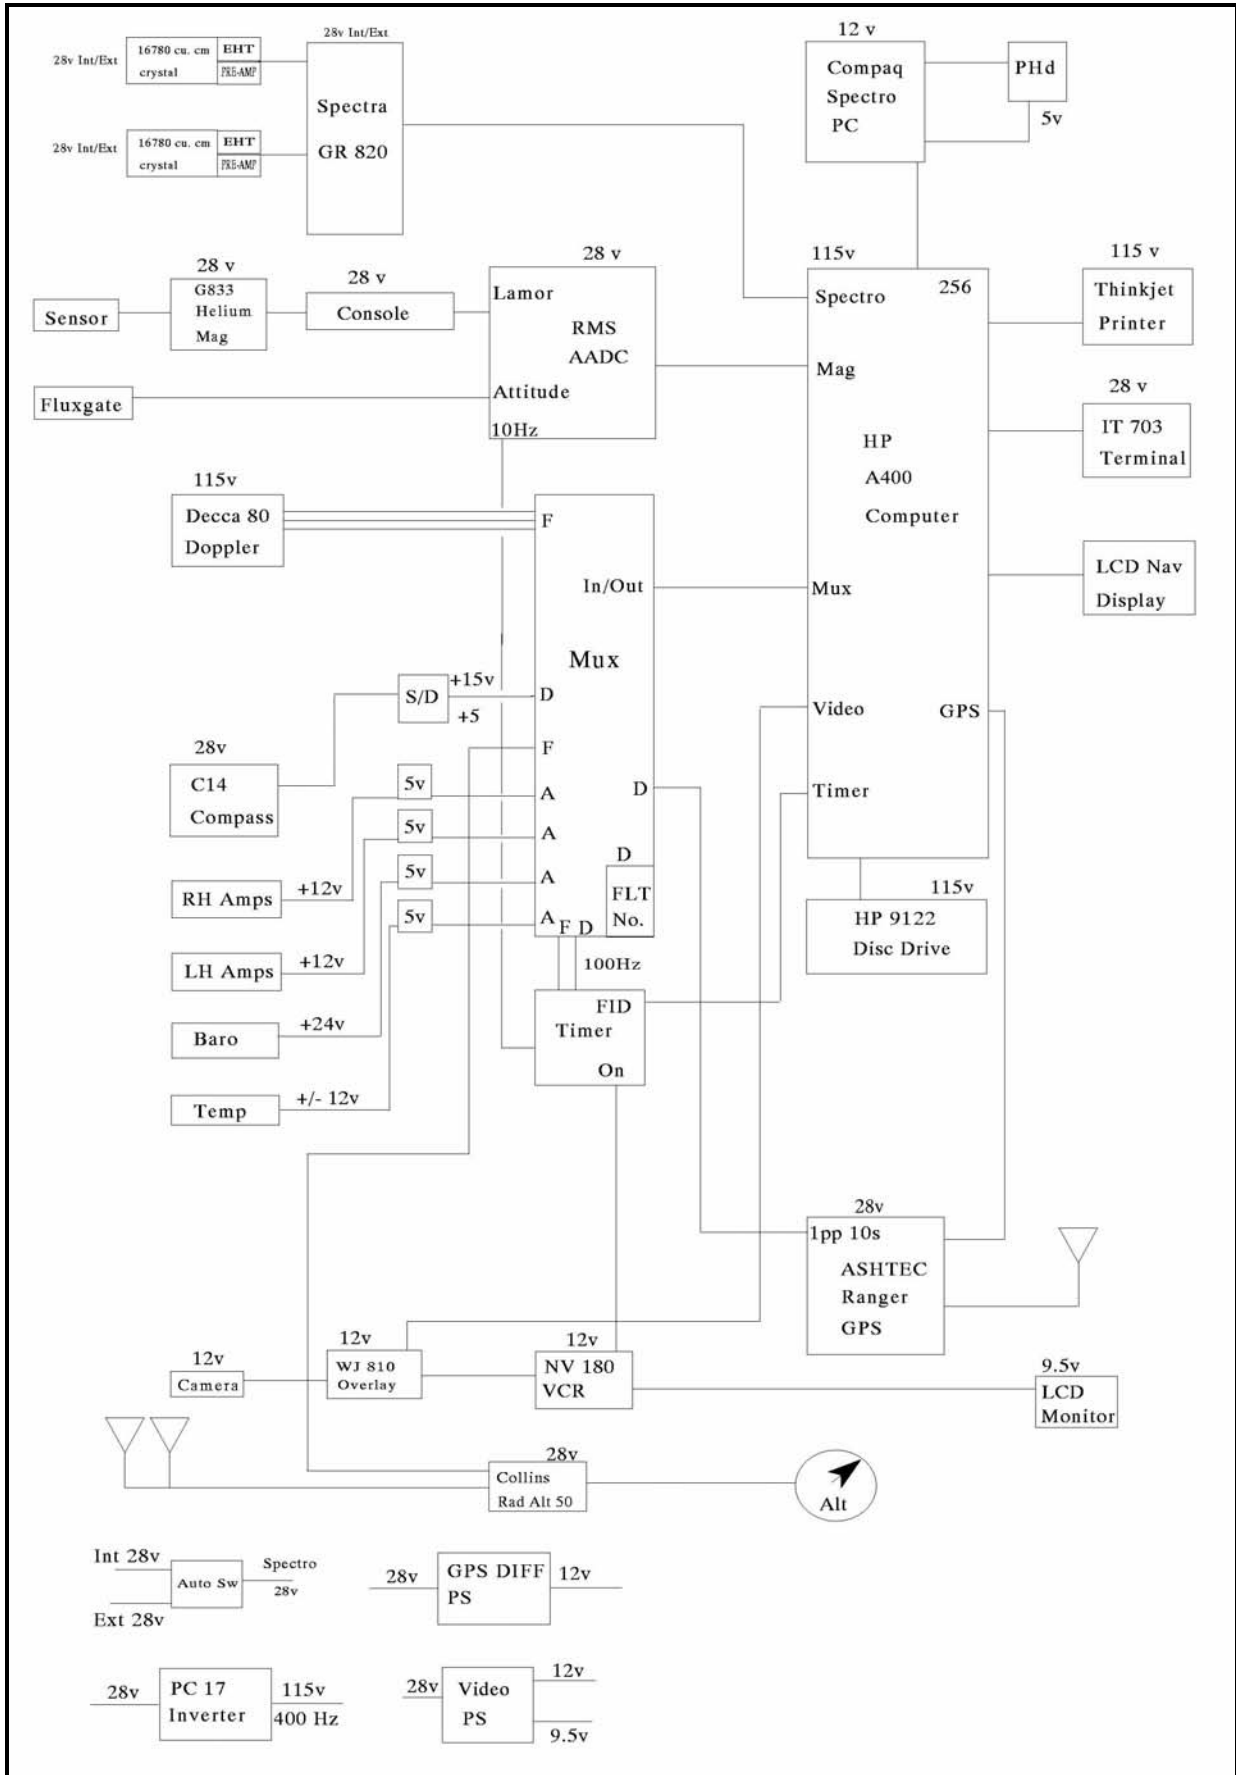

APPENDIX I-1

Compensation Results

COMPENSATION 1. Date flown: 4 April 1995
 Dates used: 4 April to 2 May 1995

Air conditioner off	SDU = 0.3110
	SDC = 0.03353
	IR = 9.3
	VN = 19.9

Air conditioner on	SDU = 0.3921
	SDC = 0.08624
	IR = 4.5
	VN = 17.1

COMPENSATION 2. Date flown: 2 May 1995 (after aircraft service & right hand alternator change)

 Dates used: 2 May to 1 June 1995

Air conditioner off	SDU = 0.4178
	SDC = 0.05512
	IR = 7.6
	VN = 19.8

Air conditioner on	SDU = 0.4392
	SDC = 0.04905
	IR = 9.0
	VN = 20.9

COMPENSATION 3. Date flown: 1 June 1995 (after aircraft service)

 Dates used: 1 June - 29 June 1995

Air conditioner off	SDU = 0.2947
	SDC = 0.03192
	IR = 9.2
	VN = 18.5

Air conditioner on	SDU = 0.3567
	SDC = 0.04843
	IR = 7.4
	VN = 20.2

APPENDIX I-2

Compensation Results

SDU = Standard deviation of the data recorded during manoeuvres.


SDC = Standard deviation of the data recorded during manoeuvres after compensation corrections have been applied.

IR = Improvement ratio = SDU / SDC

VN = Vector Norm, a measure of the degree of difficulty in calculating the coefficients.

APPENDIX J


Gamma-ray Spectrometer Test Line Location

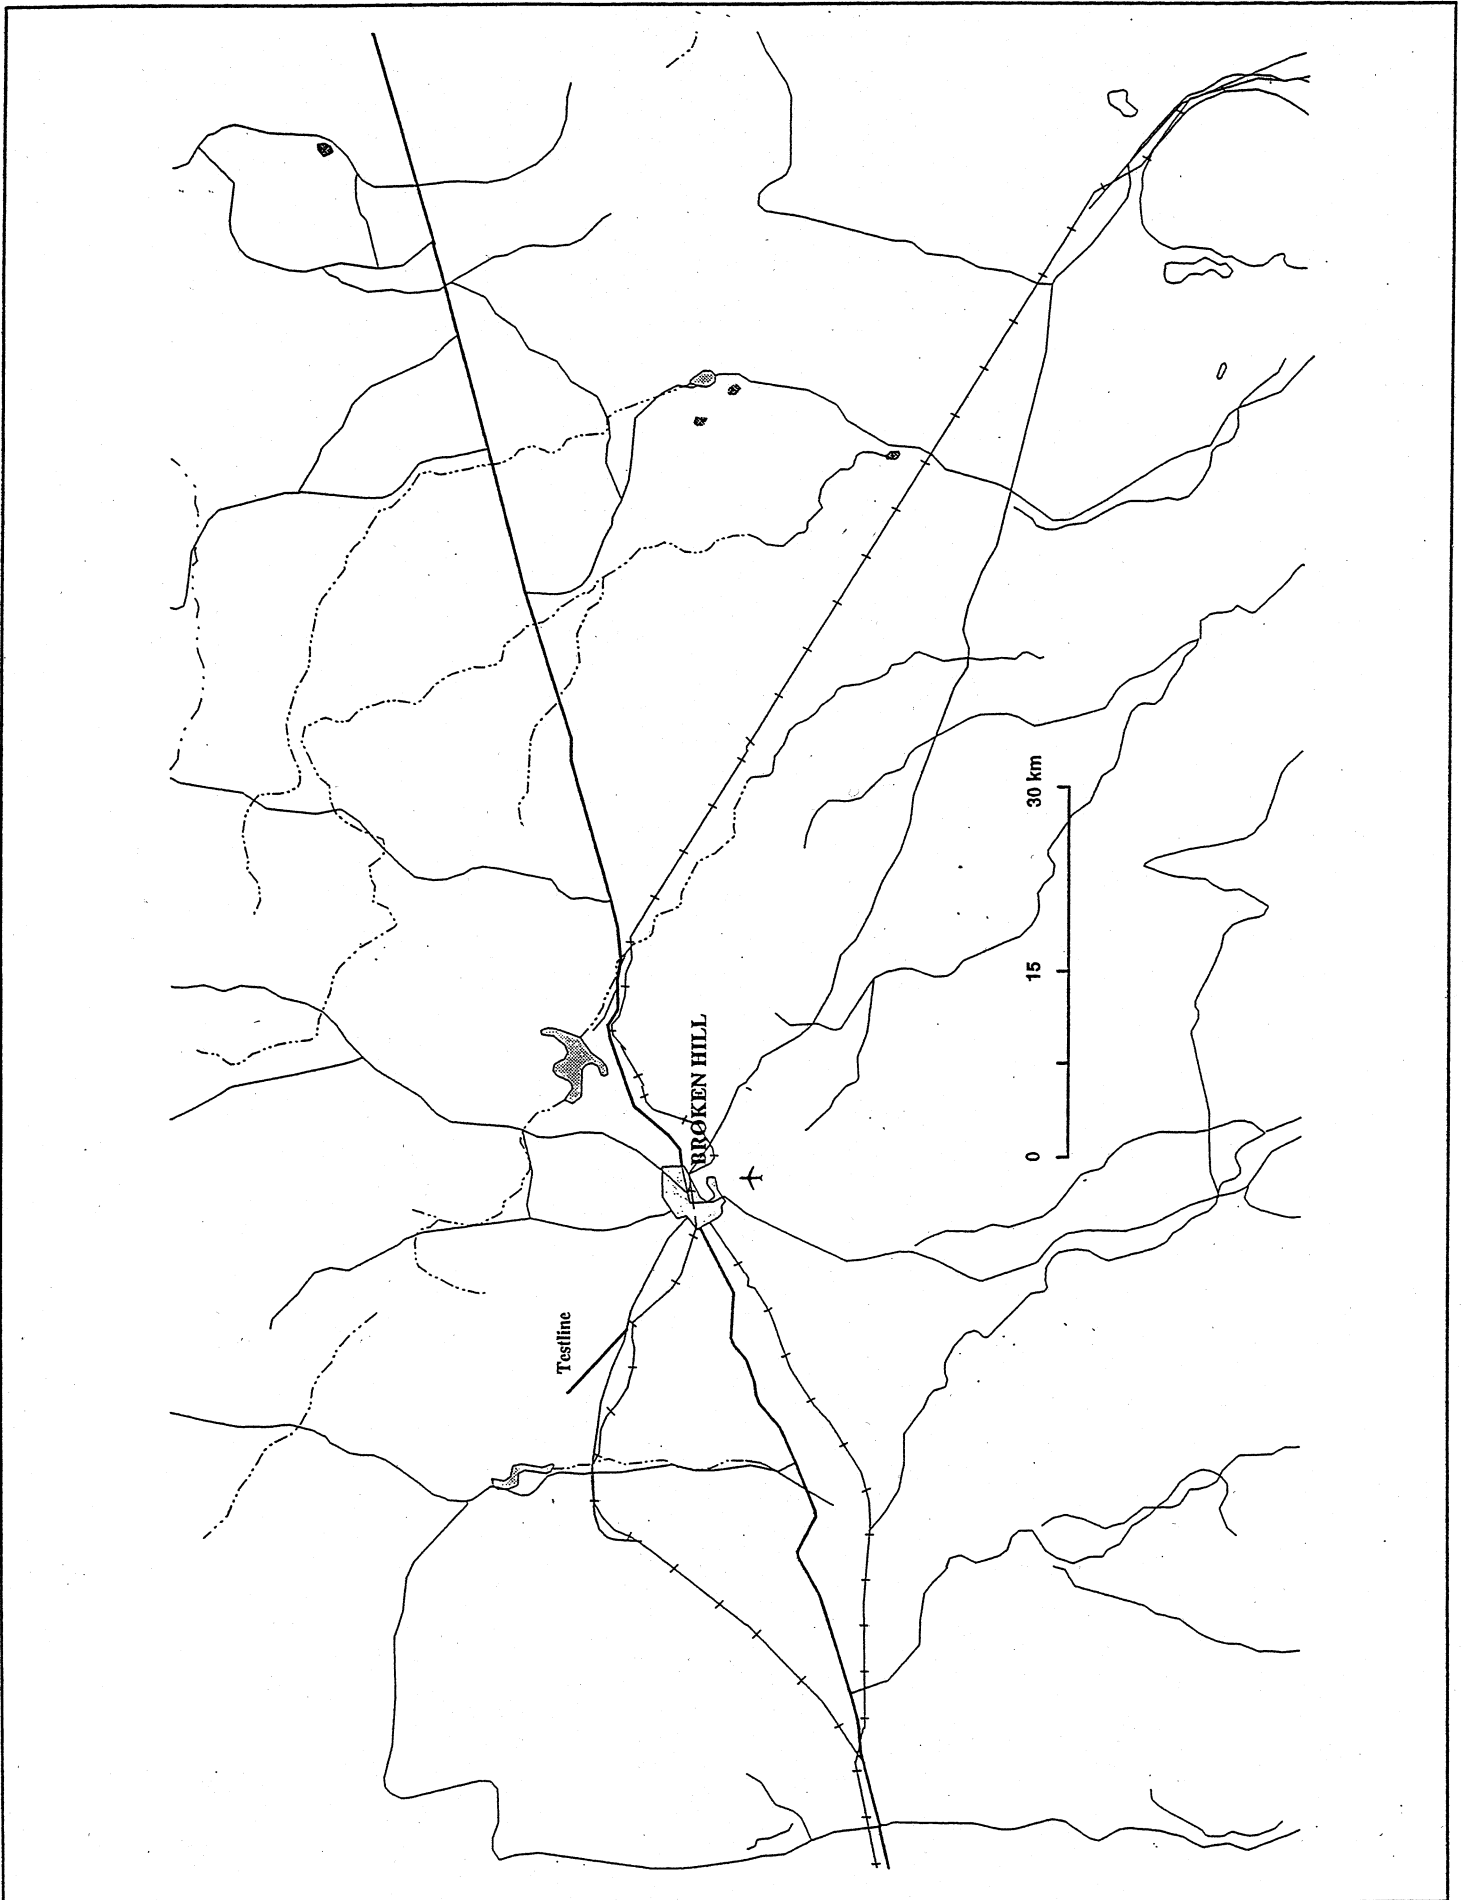

APPENDIX K

The World Geodetic System 1984 Datum

For geophysical surveys the real shape of the earth has to be considered. An ellipsoid of revolution around the earth's north-south axis approximates the earth's shape. This figure is called the spheroid. The mean sea level equipotential surface describing the shape of the earth is known as the geoid.

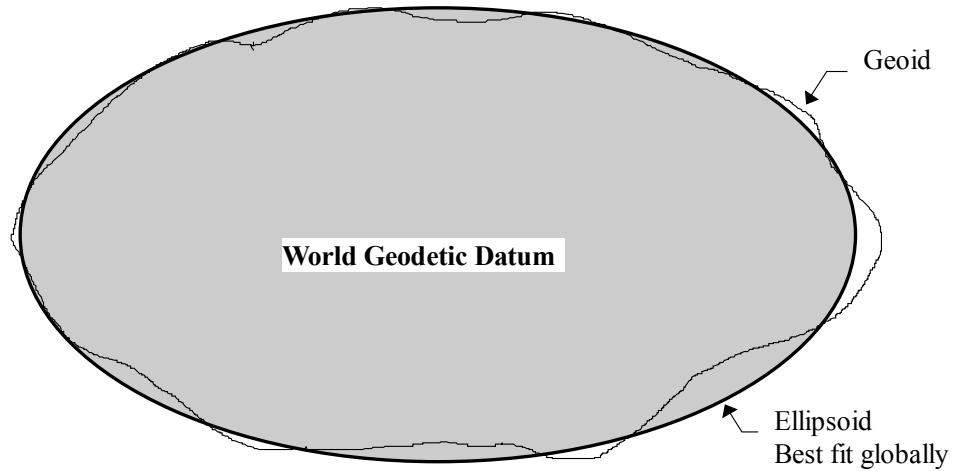

Calculated positions from the GPS are in the World Geodetic System 1984 (WGS84). The WGS84 datum is a global geocentric reference datum that has as its origin the Earth's centre of mass.

This geocentric datum comprises a spheroid (also known as an ellipsoid) oriented and located in such a manner as to "best-fit" the geoid over the entire earth.

The WGS84 datum is defined by a semi-major axis (a) and flattening (f) of the selected ellipsoid.

$$\begin{array}{lcl} a & = & 6378137 \text{ m} \\ f & = & 1/298.2572 \end{array}$$

APPENDIX L

Corrections to Differential GPS Navigation Data

(a) Position calculation delay correction

A correction due to the finite time taken for the GPS system to calculate a position and transfer the information to the acquisition system. A delay of 0.6 seconds has been determined for calculations using up to eight satellites by flying clover leaf patterns over a reference point. This value is considered to be representative and was used for all delay corrections.

(b) Fiducial synchronisation correction

A correction due to the time lag between when a GPS position is available to the acquisition system and when the next fiducial is available to pair the position with.

(c) "Ranger" corrections

Using the range data which are recorded internally on both GPS receivers every five seconds, "Ranger" calculates the correct positions at five second intervals along the flight path. These corrected positions are utilised when correcting the aircraft raw position data which are recorded every second.

Discontinuities (steps) sometimes occur in raw GPS data. These are also manifested as steps in the correction set.

When such steps in the raw GPS data occur between successive correction values, the corrections are linearly interpolated to the step boundary using corrections from the appropriate side of the step.

If multiple steps in the raw GPS data occur between successive correction values it is impossible to interpolate corrections over this interval, in which case the intervening GPS data are set to undefined.

(d) Low pass filter

The problem described in (c) can lead to small steps in the data where the original steps were too small to detect so were not corrected. A low pass 11 point convolution filter with a cut-off wavelength of 300 m was passed over the data.

(e) Reference navigation data to position of magnetometer sensor

The calculated GPS positions refer to the position of the GPS receiver's antenna. Since the magnetometer is the most position sensitive instrument, all position data is shifted 11.4 meters toward the rear of the aircraft to correspond with the position of the magnetometer's sensor.

(f) Doppler infill of gaps

Whenever gaps (<5 km) in the GPS data occurred they were infilled with data generated from the doppler navigation system. Gaps in the GPS data greater than ten kilometres were reflown.

APPENDIX M-1

Geophysical Maps

Name	Type	Contour Interval / Vertical Scale	Reference Number
1:250 000 scale			
Curnamona	TMI Contours	50 nT	22-1/H54-14/1
"	TC Contours	100 cps	22-1/H54-14/2
"	DEM Contours	2 m	22-1/H54-14/19
1:100 000 scale			
Pasmore	TMI Contours	2 nT	22-2/H54-14/1-1
"	TC Contours	50 cps	22-2/H54-14/2-1
"	Flight Path		22-2/H54-14/3-1
"	TMI Profiles	100 nT/cm	22-2/H54-14/4-1
Benagerie	TMI Contours	5 nT	22-2/H54-14/1-2
"	TC Contours	50 cps	22-2/H54-14/2-2
"	Flight Path		22-2/H54-14/3-2
"	TMI Profiles	350 nT/cm	22-2/H54-14/4-2
Lake Charles	TMI Contours	5 nT	22-2/H54-14/1-3
"	TC Contours	25 cps	22-2/H54-14/2-3
"	Flight Path		22-2/H54-14/3-3
"	TMI Profiles	350 nT/cm	22-2/H54-14/4-3
Kalabity	TMI Contours	20 nT	22-2/H54-14/1-5
"	TC Contours	50 cps	22-2/H54-14/2-5
"	DEM Contours	1 m	22-2/H54-14/19-5
Mulyungarie	TMI Contours	25 nT	22-2/H54-14/1-6
"	TC Contours	50 cps	22-2/H54-14/2-6
"	DEM Contours	1 m	22-2/H54-14/19-6
1:50 000 scale			
Kalabity One Special	TMI Contours	10 nT	22-3/H54-14/1-5/1 & 2
"	TC Contours	25 cps	22-3/H54-14/2-5/1 & 2
Kalabity Four Special	TMI Contours	10 nT	22-3/H54-14/1-5/4 & 3
"	TC Contours	25 cps	22-3/H54-14/2-5/4 & 3
Mulyungarie One	TMI Contours	20 nT	22-3/H54-14/1-6/1
"	TC Contours	25 cps	22-3/H54-14/2-6/1
Mulyungarie Two	TMI Contours	20 nT	22-3/H54-14/1-6/2
"	TC Contours	25 cps	22-3/H54-14/2-6/2
Mulyungarie Three	TMI Contours	20 nT	22-3/H54-14/1-6/3
"	TC Contours	25 cps	22-3/H54-14/2-6/3
Mulyungarie Four	TMI Contours	10 nT	22-3/H54-14/1-6/4
"	TC Contours	25 cps	22-3/H54-14/2-6/4

APPENDIX M-2

Geophysical Maps

Name	Type	Contour Interval / Vertical Scale	Reference Number
1:25 000 scale			
Kalabity One Nth	TMI Contours	5 nT	22-4/H54-14/1-5/1/N
"	TC Contours	10 cps	22-4/H54-14/2-5/1/N
"	Flight Path		22-4/H54-14/3-5/1/N
"	TMI Profiles	150 nT/cm	22-4/H54-14/4-5/1/N
Kalabity One Sth	TMI Contours	5 nT	22-4/H54-14/1-5/1/S
"	TC Contours	10 cps	22-4/H54-14/2-5/1/S
"	Flight Path		22-4/H54-14/3-5/1/S
"	TMI Profiles	200 nT/cm	22-4/H54-14/4-5/1/S
Kalabity Two Nth	TMI Contours	5 nT	22-4/H54-14/1-5/2/N
"	TC Contours	20 cps	22-4/H54-14/2-5/2/N
"	Flight Path		22-4/H54-14/3-5/2/N
"	TMI Profiles	200 nT/cm	22-4/H54-14/4-5/2/N
Kalabity Three Nth	TMI Contours	10 nT	22-4/H54-14/1-5/3/N
"	TC Contours	10 cps	22-4/H54-14/2-5/3/N
"	Flight Path		22-4/H54-14/3-5/3/N
"	TMI Profiles	300 nT/cm	22-4/H54-14/4-5/3/N
Kalabity Four Nth	TMI Contours	1 nT	22-4/H54-14/1-5/4/N
"	TC Contours	10 cps	22-4/H54-14/2-5/4/N
"	Flight Path		22-4/H54-14/3-5/4/N
"	TMI Profiles	50 nT/cm	22-4/H54-14/4-5/4/N
Kalabity Four Sth	TMI Contours	5 nT	22-4/H54-14/1-5/4/S
"	TC Contours	10 cps	22-4/H54-14/2-5/4/S
"	Flight Path		22-4/H54-14/3-5/4/S
"	TMI Profiles	300 nT/cm	22-4/H54-14/4-5/4/S
Mulyungarie One Nth	TMI Contours	5 nT	22-4/H54-14/1-6/1/N
"	TC Contours	10 cps	22-4/H54-14/2-6/1/N
"	Flight Path		22-4/H54-14/3-6/1/N
"	TMI Profiles	200 nT/cm	22-4/H54-14/4-6/1/N
Mulyungarie One Sth	TMI Contours	10 nT	22-4/H54-14/1-6/1/S
"	TC Contours	10 cps	22-4/H54-14/2-6/1/S
"	Flight Path		22-4/H54-14/3-6/1/S
"	TMI Profiles	500 nT/cm	22-4/H54-14/4-6/1/S
Mulyungarie Two Nth	TMI Contours	10 nT	22-4/H54-14/1-6/2/N
"	TC Contours	10 cps	22-4/H54-14/2-6/2/N
"	Flight Path		22-4/H54-14/3-6/2/N
"	TMI Profiles	750 nT/cm	22-4/H54-14/4-6/2/N
Mulyungarie Two Sth	TMI Contours	10 nT	22-4/H54-14/1-6/2/S
"	TC Contours	10 cps	22-4/H54-14/2-6/2/S
"	Flight Path		22-4/H54-14/3-6/2/S
"	TMI Profiles	500 nT/cm	22-4/H54-14/4-6/2/S
Mulyungarie Three Nth	TMI Contours	5 nT	22-4/H54-14/1-6/3/N
"	TC Contours	10 cps	22-4/H54-14/2-6/3/N
"	Flight Path		22-4/H54-14/3-6/3/N
"	TMI Profiles	350 nT/cm	22-4/H54-14/4-6/3/N
Mulyungarie Three Sth	TMI Contours	10 nT	22-4/H54-14/1-6/3/S
"	TC Contours	10 cps	22-4/H54-14/2-6/3/S
"	Flight Path		22-4/H54-14/3-6/3/S
"	TMI Profiles	350 nT/cm	22-4/H54-14/4-6/3/S

APPENDIX M-3

Geophysical Maps

Name	Type	Contour Interval / Vertical Scale	Reference Number
Mulyungarie Four Nth	TMI Contours	2 nT	22-4/H54-14/1-6/4/N
"	TC Contours	10 cps	22-4/H54-14/2-6/4/N
"	Flight Path		22-4/H54-14/3-6/4/N
"	TMI Profiles	150 nT/cm	22-4/H54-14/4-6/4/N
Mulyungarie Four Sth	TMI Contours	5 nT	22-4/H54-14/1-6/4/S
"	TC Contours	10 cps	22-4/H54-14/2-6/4/S
"	Flight Path		22-4/H54-14/3-6/4/S
"	TMI Profiles	250 nT/cm	22-4/H54-14/4-6/4/S

APPENDIX N-1

AGSO ARCHIVE DATA, GRID AND MAGNETIC TAPE FORMAT FOR AIRBORNE GEOPHYSICAL DATA

CONTENTS

1. THE AGSO SEQUENTIAL FILE STRUCTURE

- 1.1 INTRODUCTION
- 1.2 GENERAL FILE STRUCTURE
- 1.3 CHANNELS AND SAMPLES
- 1.4 SEGMENT DIRECTORY RECORD
- 1.5 DATA RECORD
- 1.6 NO DATA VALUE
- 1.7 STANDARD DATA CHANNELS

2. PHYSICAL FORMAT FOR MAGNETIC TAPES

- 2.1 GENERAL
- 2.2 PHYSICAL PARAMETERS OF TAPE
- 2.3 TAPE STRUCTURE
- 2.4 PHYSICAL RECORDS AND BLOCKS

3. GRID FILE FORMAT

- 3.1 HEADER RECORD
- 3.2 DATA RECORDS

TABLES

FIGURES

APPENDIX N-2

AGSO ARCHIVE DATA, GRID AND MAGNETIC TAPE FORMAT FOR AIRBORNE GEOPHYSICAL DATA

1. THE AGSO SEQUENTIAL FILE STRUCTURE

1.1 INTRODUCTION

This appendix describes the general sequential file structure used by AGSO to store airborne geophysical data. For the purpose of this survey nine data chains are involved for each line and tie. They are:

- channel 4 edition 1 (processed navigation)
- channel 4 edition 2 (processed magnetics)
- channel 4 edition 3 (processed spectrometrics)
- channel 4 edition 4 (processed digital elevation model)
- channel 5 edition 1 (doppler)
- channel 6 edition 1 (raw spectrometrics)
- channel 8 edition 1 (raw magnetics)
- channel 10 edition 1 (multi-channel spectra)
- channel 14 edition 1 (pressure, temperature, cosmic data)
- channel 16 edition 1 (raw navigation)

1.2 GENERAL FILE STRUCTURE

The information pertaining to each traverse (line or tie) is held on the file as a separate entity called a segment. Segments are separated from each other by industry standard EOF records. The end of the file is indicated by two or more consecutive EOF records. Each segment consists of two types of records. Both types are 5120 characters long.

1. Segment Directory Record (SDR) : the first record on each segment. It defines the data content of the segment.
2. Data Records (DAR's) : hold the measured data values. The general structure is shown in Figure 1.

1.3 CHANNELS AND SAMPLES

Data are recorded at regular intervals in time along a traverse. The data recorded at one instant of time are held as any ordered set or sub-set. Each set is held logically distinct and referred to as a channel. The data records in a segment hold all the information for one channel in the form of a data chain, then all the data for the next channel and so on for as many channels as the segment holds.

Each channel is uniquely defined by a channel number and an edition number. The measurement(s) taken for a channel at a given time is called a sample. Samples are held within each channel in increasing order of fiducial (time).

In defining channels the channel number can be used to define the sample format and the edition type of the data. For example, within AGSO, samples with format (longitude, latitude, value, value....) have a channel number of 4 with edition 2 for magnetics and edition 3 for radiometrics.

APPENDIX N-3

AGSO ARCHIVE DATA, GRID AND MAGNETIC TAPE FORMAT FOR AIRBORNE GEOPHYSICAL DATA

1.4 SEGMENT DIRECTORY RECORD (SDR)

Lines and ties are uniquely identified as follows :

1. Project number: a unique number to identify the survey.
2. Group number : a unique number within a survey for each flight made. That is, several lines may be recorded on one flight (group). AGSO convention is for group numbers to lie between 001 and 999 inclusive.
3. Segment numbers : a unique number within a survey for a line or tie. AGSO convention is for ordinary line numbers to lie between 1000 and 9999 inclusive and tie line numbers between 100 and 999 inclusive.

The segment directory record identifies the data segment at Project, Group and Segment level and defines the data channels, their structure and the location of their data chains in the segment. Each SDR consists of one or more 10 word blocks. The first , the Segment Identification Block (SIB), identifies the segment and gives the number of data channels held in the segment.

For this survey the number of data channels is nine as mentioned in the introduction. Subsequent blocks, one for each data channel, define the data channels and their location within the segment. These are called Channel Identification Blocks (CIB's). A typical SDR is shown in Figure 1 and its exact format given in Table 1. All unused words in the SDR are set to zero.

The last word in the record in the past has been used as check sum and represents the sum of all the other words in the record. The check sum word is no longer used and is set to zero.

The overall record format is 2I9, 509I10, I12.

1.5 DATA RECORD (DAR)

These each contain 512 values. The first two are fiducials giving the fiducial range of the samples contained in the record. The next 508 represent data values, the second last is always zero (to maintain compatibility with our random access file format) and the last is a record check sum representing the sum of all other values in the record.

If a record is the last one in a data chain for a given channel all unused values are set to zero, with the next channel commencing at the start of the next data record. The N data records in a segment are numbered from 2 to N+1, the SDR being regarded as record one in a segment, with records for a given channel following each other sequentially. The data record addresses in the channel identification block of the SDR refer to this sequential numbering of the data records. A typical segment is shown in Figure 1 and the exact format of a data record given in Table 2.

The overall format of each data record is : 2I9, 509I10, I12.

APPENDIX N-4

AGSO ARCHIVE DATA, GRID AND MAGNETIC TAPE FORMAT FOR AIRBORNE GEOPHYSICAL DATA

1.6 NO DATA VALUE

For a variety of reasons it is sometimes necessary to flag a data value to indicate it is to be ignored. This is achieved by replacing the data word in question by the value 536870912. If a gap exists in a data chain each word of every sample involved must be replaced by 536870912, the so-called missing value. Thus a 1:1 correspondence is maintained between the fiducials encompassed by a data chain and its samples.

1.7 STANDARD DATA CHANNELS

The standard AGSO data channels are :

- channel 4 edition 1 (processed navigation)
- channel 4 edition 2 (processed magnetics)
- channel 4 edition 3 (processed spectrometrics)
- channel 4 edition 4 (processed digital elevation model)
- channel 5 edition 1 (doppler)
- channel 6 edition 1 (raw spectrometrics)
- channel 8 edition 1 (raw magnetics)
- channel 10 edition 1 (multi-channel spectra)
- channel 14 edition 1 (pressure, temperature, cosmic data)
- channel 16 edition 1 (raw navigation)

C4 E1 - Navigation

Channel number = 4

Edition number = 1

Sample size = 2 words

word 1 = Longitude in degrees * 1 000 000

word 2 = Latitude in degrees * 1 000 000

APPENDIX N-5

AGSO ARCHIVE DATA, GRID AND MAGNETIC TAPE FORMAT FOR AIRBORNE GEOPHYSICAL DATA

C4 E2 - Corrected Total Magnetic Intensity

Channel number = 4

Edition number = 2

Sample size = 4 words

word 1 and word 2 as for C4 E1

word 3 = final (non micro-levelled) TMI (nT) * 1000

word 4 = final micro-levelled TMI (nT) *1000

C4 E3 - Corrected Gamma-ray Spectrometer Data

Channel number = 4

Edition number = 3

Sample size = 7 words

word 1 and word 2 as for C4 E1

word 3 = final Total Count (counts/sec) * 1000

word 4 = final Potassium (counts/sec) * 1000

word 5 = final Uranium (counts/sec) * 1000

word 6 = final Thorium (counts/sec) * 1000

word 7 = Altitude in metres above ground level

C4 E4 - Corrected Digital Elevation Model Data

Channel number = 4

Edition number = 2

Sample size = 4 words

word 1 and word 2 as for C4 E1

word 3 = final Aircraft Elevation (metres above sea level) * 1000

word 4 = final Terrain Elevation (metres above sea level) * 1000

C5 E1 - Doppler navigation data

Channel number = 5

Edition number = 1

Sample size = 2 words

word 1 = doppler along track (km)

word 2 = doppler across track (m)

APPENDIX N-6

AGSO ARCHIVE DATA, GRID AND MAGNETIC TAPE FORMAT FOR AIRBORNE GEOPHYSICAL DATA

C6 E1 - Raw spectrometer data.

Channel number = 6

Edition number = 1

Sample size = 5 words

word 1 = Total count (counts/sec) * 1000

word 2 = Potassium (counts/sec) * 1000

word 3 = Uranium (counts/sec) * 1000

word 4 = Thorium (counts/sec) * 1000

word 5 = Altitude in metres above ground level

C8 E1 - Raw Magnetics

Channel number = 8

Edition number = 1

Sample size = 1 word

word 1 = TMI * 1000

C10 E1 - Multi-channel spectra

Channel number = 10

Edition number = 1

Sample size = 290 words

word 1 = start fiducial for spectra

word 2 = integration time for spectra (seconds)

word 3 - 34 = define energy range of spectra, fiducials etc.

Some control words yet to be defined.

word 35 = counts in channel 0 (* 1000)

word 36 = counts in channel 1 (* 1000)

word 290 = counts in channel 255 (* 1000)

C14 E1 - Pressure and Temperature

Channel number = 14

Edition number = 1

Sample size = 7 words

word 1 = pressure in millibars * 1000

word 2 = temperature in degrees Celsius * 1000

word 3 - 6 = no longer used

word 7 = cosmic channel (counts) * 1000

APPENDIX N-7

AGSO ARCHIVE DATA, GRID AND MAGNETIC TAPE FORMAT FOR AIRBORNE GEOPHYSICAL DATA

C16 E1 - Raw GPS data

Channel number = 16

Edition number = 1

Sample size = 4 words

word 1 = Longitude in degrees * 1 000 000

word 2 = Latitude in degrees * 1 000 000

word 3 = GPS time in seconds * 1000.

GPS time is recorded in seconds from midnight the previous Sunday

word 4 = Lag time. Time difference between time when a position is calculated and time until the next fiducial is generated by the data acquisition system. (hundredths of a second)

2. PHYSICAL FORMAT FOR MAGNETIC TAPES

2.1 GENERAL

Each magnetic tape (MT) consists of a sequence of segments each segment consisting of one or more physical records. Segments are to be separated by one EOF markers. The end of all information on a tape must be flagged by two or more consecutive EOF markers. Industry standard EOF records apply. Records are to be fixed length and each block is to contain one record.

2.2 PHYSICAL PARAMETERS OF TAPES

- a. Tapes are 12.7 mm (0.5 inch) wide, 9 track industry standard magnetic tapes.
- b. Each tape has an external label identifying the airborne survey, character code, recording density, date tape written and the reel number in the set.

2.3 TAPE STRUCTURE

- a. 9 track
- b. Written in ASCII
- c. Recording density of 6250 bpi
- d. International Standards Organisation end-of-block markers (EOB)
- e. International Standards Organisation end-of-file markers (EOF)
- f. No multi-tape files
- g. Multi-file tapes can be expected. Files will not span tapes.
- h. Last file on each tape shall end with at least two EOF's.

APPENDIX N-8

AGSO ARCHIVE DATA, GRID AND MAGNETIC TAPE FORMAT FOR AIRBORNE GEOPHYSICAL DATA

2.4 PHYSICAL RECORDS AND BLOCKS

- a. Fixed length records of 5120 characters
- b. One record per block

3. GRID FILE FORMAT

3.1 HEADER RECORD

The first record on the file defines the content of the grid, including:

- a. Origin in latitude and longitude.
- b. Grid cell size.
- c. Number of rows and columns in the grid.
- d. Storage mode, ie. whether the data is stored row by row or column by column. In general the data is stored by row.
- e. The exact header record format is in Table 3.

3.2 DATA RECORDS

Each data record contains 320 values in E16.10 format. No location data is held in the data records - the location of a grid point is determined by its sequence within the file. The data for the grid may be sequenced in row or column order (ie. row by row or column by column respectively). Each row or column is written on consecutive records and begins at the start of a new record. If the rows/columns do not contain a multiple of 320 values the last record for each row/column is padded with zeros. Any point in the grid which is undefined is set to -9999.0.

In ROW mode , rows are sequenced from north to south and within each row values are ordered from west to east.

In COLUMN mode, columns are sequenced from west to east and within each column values are ordered from north to south.

APPENDIX N-9

AGSO ARCHIVE DATA, GRID AND MAGNETIC TAPE FORMAT FOR AIRBORNE GEOPHYSICAL DATA

TABLE 1

SEGMENT DIRECTORY RECORD FORMAT

1. SEGMENT IDENTIFICATION BLOCK

<u>WORD</u>	<u>CONTENT AND USE</u>	<u>FORMAT</u>
1	PROJECT IDENTIFICATION	I9
2	GROUP IDENTIFICATION	I9
3	SEGMENT IDENTIFICATION	I10
4	NUMBER OF CHANNELS ON SEGMENT	I10
5	DATE CODE - YYMMDD	I10
6	FIDUCIAL FACTOR - (fiducial size in seconds)	I10
7	TIME OF DAY AT FIDUCIAL ZERO IN SECONDS	I10
8	BEARING IN DEGREES (0-359) MEASURED EAST OF NORTH	I10
9	ALTITUDE IN METRES ABOVE SEA LEVEL	I10
10	GROUND CLEARANCE IN METRES	I10

2. CHANNEL IDENTIFICATION BLOCK (for the Nth channel)

<u>WORD</u>	<u>CONTENT AND USE</u>	<u>FORMAT</u>
1	CHANNEL CODE	I10
2	EDITION NUMBERS	I10
3	FIDUCIAL INTERVAL BETWEEN SAMPLES	I10
4	NUMBER OF DATA VALUES (WORDS) PER SAMPLE	I10
5	ADDRESS OF FIRST DATA RECORD FOR CHANNEL	I10
6	ADDRESS OF LAST SAMPLE IN DATA CHAIN	I10
7	FIDUCIAL OF FIRST SAMPLE IN DATA CHAIN	I10
8	FIDUCIAL OF LAST SAMPLE IN DATA CHAIN	I10
9	UNUSED - SET TO ZERO	I10
10	UNUSED - SET TO ZERO	I10

APPENDIX N-10

AGSO ARCHIVE DATA, GRID AND MAGNETIC TAPE FORMAT FOR AIRBORNE GEOPHYSICAL DATA

TABLE 2

DATA RECORD FORMAT

WORD	CONTENT AND USE	FORMAT
1	FIDUCIAL AT FIRST DATA SAMPLE IN RECORD	I9
2	FIDUCIAL AT LAST DATA SAMPLE IN RECORD	I9
3	FIRST WORD OF FIRST SAMPLE	I10
4	SECOND WORD OF FIRST SAMPLE	I10
	FIRST WORD OF SECOND SAMPLE	I10
	SECOND WORD OF SECOND SAMPLE	I10
	ETC	
511	ALWAYS UNUSED - SET TO ZERO	I10
512	ALWAYS UNUSED - SET TO ZERO	I12

- NOTE:
1. A data sample can be of any length greater than zero.
 2. Each record contains an integral number of samples. This may lead to several unused words at the end of the record which are set to zero.
 - ie. If a sample is 7 words long 72 samples will fit in a data record and words 507-510 will be set to zero.

APPENDIX N-11

AGSO ARCHIVE DATA, GRID AND MAGNETIC TAPE FORMAT
FOR AIRBORNE GEOPHYSICAL DATA

TABLE 3

GRID HEADER RECORD FORMAT

CHARACTER POSITION	FIELD LENGTH	FORTRAN FORMAT	CONTENT
1-60	60	6A10	Grid Identification
61-170	10	11A10	Facts defining data acquisition/processing
171-180	10	A10	x,y units defining grid, Usually degrees.
181-192	12	E12.6	x origin of surface. Bottom left hand corner.
193-204	12	E12.6	y origin of surface. Bottom left hand corner.
205-214	10	A10	Type of z data in grid (eg TMI).
215-216	2	A2	Blanks.
217-228	12	I12	Number of data records per column or row.
229-240	12	E12.6	Grid increment in the x direction
241-252	12	E12.6	Grid increment in the y direction
253-262	10	A10	Time when original surface created (hh.mm.ss).
263-286	24	2A10,A4	Filter used on original z data.
287-310	12	2E12.6	x,y co-ordinate of the bottom left hand corner of the grid. Same as x,y origin.
311-320	10	A10	Date of creation of surface (dd/mm/yy).
321-344	24	2A10,A4	Blanks.
345-368	12	2E12.6	x,y co-ordinate of top right hand corner of grid. NOTE: these values are too large by one grid increment for tapes created prior to 01/06/85.
369-373	4	I5	Number of rows in the grid.
374-378	5	I5	Number of columns in the grid.
379-382	4	A4	Blanks.
383-388	6	A6	Defines if the grid is stored in column mode (COLUMN) or row mode (ROW).
389-5120			Blank filled.