



Australian Government
Geoscience Australia



Toitū Te Whenua
Land Information
New Zealand

SouthPAN Service Definition Document for Data Access Services

Project: Southern Positioning Augmentation Network

Effective Date: 9 April 2026

Document Code: SBAS-STN-0002

Classification (AU) OFFICIAL

Classification (NZ) UNCLASSIFIED

Record ID (AU): D2023-53486

Record ID (NZ): A5563666

Revision No.: 02



SBAS-STN-0002	D2023-53486	A5563666
Revision 02	9 April 2026	Page 1 of 51

Disclaimer

To the maximum extent permitted by law, each End User's access to and/or use of the Southern Positioning Augmentation Network (**SouthPAN**) including, without limitation, each End User's access to and/or use of the SouthPAN Open Service, Safety-of-Life Service or Aeronautical Radio Navigation Service (collectively, the **End-User Services**) or any associated data or services:

- is on an 'as-is' and 'as available' basis with all faults, and the Commonwealth of Australia and the Sovereign in Right of New Zealand each disclaim all warranties, guarantees or representations of any kind, and
- is entirely at each End User's own risk, and the Commonwealth of Australia and the Sovereign in Right of New Zealand each disclaim any liability to any End User or anyone else for any liability whatsoever (including, without limitation, any liability for negligence).

Neither the Commonwealth of Australia nor the Sovereign in Right of New Zealand intend to create any contractual legal relations with any End User in relation to any End User's access to and/or use of the SouthPAN or any of the End-User Services or any associated data or services.

Where an End-User accesses or uses any of the End-User Services for the purposes of making goods or services available to one or more other persons, that End-User assumes, to the maximum extent permitted by law, any and all liability to those persons in connection with or arising out of those End-User Services and will be taken to have made those persons aware of this disclaimer.

The End-User Services have the performance targets defined in sections 11, 12, and 13 of this document.

For the purposes of this disclaimer:

- the **Commonwealth of Australia** includes its servants, agents, officers, representatives and instrumentalities (however described), and
- the **Sovereign in Right of New Zealand** includes its servants, agents, officers, representatives, and instrumentalities (however described).

SBAS-STN-0002	D2023-53486	A5563666
Revision 02	9 April 2026	Page 2 of 51

Limitations

There are a number of limitations that may affect SouthPAN or any of the End-User Services. This section lists some of those limitations, but is not an exhaustive statement of all limitations. End-Users should consult this SouthPAN Service Definition Document for Data Access Services and independently consider the suitability of SouthPAN or any of the End-User Services for any particular purpose.

Atmospheric (ionospheric) activity north of 20°S will cause issues with maintaining lock on Global Navigation Satellite System (**GNSS**) Space Vehicles (**SV**) (due to scintillation) and/or introducing large localised gradients (due to plasma bubbles). The former is an issue for most End-Users Services; the latter for single-frequency and Safety-of-Life Services.

Service coverage will be further limited by other factors including, without limitation, the following:

- user environment (noise, sky-view);
- ability of the SouthPAN System to detect GNSS SVs:
 - SV satellite elevation mask set by the SouthPAN System;
 - Number of GNSS Reference Site (**GRS**) necessary to track a particular satellite;
 - Location of GRS; and
 - GRS local environment (noise, sky-view);
- electromagnetic activity in the ionosphere;
- number of healthy GNSS SVs; and
- geometry of healthy GNSS SVs.

Licence

To the extent copyright subsists in any SouthPAN data made available through the SouthPAN or any of the End-User Services, it is licensed under the [Creative Commons Attribution 4.0 International Licence](#).

SBAS-STN-0002	D2023-53486	A5563666
Revision 02	9 April 2026	Page 3 of 51

Revision History

Revision Date	Rev.	Summary of Changes	Record ID
9 November 2023	01	Initial revision	AU: D2023-53486 NZ: A5563666
9 April 2026	02	Initial observed performance reported. Information about OS-GOBS added.	AU: D2023-53486 NZ: A5563666

Approvals

	Signature
PREPARED	Name: Ryan McNie Title: Performance Engineer, SouthPAN
APPROVED	Configuration Control Board: CCB38 Date: 9 April 2026 Minutes: SBAS-MIN-0049

SBAS-STN-0002	D2023-53486	A5563666
Revision 02	9 April 2026	Page 4 of 51

Table of Contents

1 Introduction	8
1.1 Document identification.....	8
1.2 Document overview	8
1.3 Document maintenance	9
1.4 Purpose.....	9
1.5 Terminology, acronyms, and abbreviations	9
1.5.1 Definitions.....	9
1.5.2 Acronyms	10
2 Reference documents	12
3 Executive summary	13
4 SouthPAN overview.....	14
4.1 Service Architecture	14
4.2 System architecture	16
4.2.1 Ground facilities.....	16
4.2.2 Space facilities	17
4.2.3 Data Access Facilities	18
4.3 Deployment strategy	18
4.4 Organisational framework	19
4.4.1 Roles & Responsibilities.....	19
4.4.2 Further information and support.....	19
5 Connection Details	20
5.1 DAS.....	20
5.2 OS-GOBS	20
6 Registration	22
6.1 DAS.....	22
6.2 OS-GOBS	22
7 DS2DC Client	23
8 DS2DC Protocol	24
8.1 Fundamentals of the SouthPAN DS2DC protocol	24
8.2 Available DS2DC Messages in SouthPAN	25
8.3 The Authentication Process	25
9 SouthPAN DAS Message.....	27
10 DAS Messages.....	28
10.1 OS-L1-DAS Messages.....	28
10.1.1 List of Message Types	28
10.2 OS-DFMC-DAS Messages	31
10.2.1 List of Message Types	31
10.2.2 Time-out table	34
10.2.3 Ephemeris Navigation Database.....	34
10.2.4 User Smoothing Time.....	34
10.3 OS-PVS-DAS Messages	35
10.3.1 PVS corrections within the DFMC SBAS navigation messages	35
10.3.2 Applicability of Corrections	36
11 L1 SBAS Open Service (OS-L1-DAS).....	37

SBAS-STN-0002	D2023-53486	A5563666
Revision 02	9 April 2026	Page 5 of 51

11.1.1 L1 SBAS Open Service Augmented Signal	37
11.1.2 L1 SBAS Open Service Coverage	37
11.1.3 L1 SBAS Open Service Reference Frame.....	37
11.1.4 L1 SBAS Network Open Service (OS-L1-DAS)	37
11.1.5 L1 SBAS Observed Performance	37
12 DFMC Open Service (OS-DFMC-DAS)	41
12.1.1 DFMC SBAS Augmented Signal.....	41
12.1.2 DFMC SBAS Open Service Coverage.....	41
12.1.3 DFMC Open Service Reference Frame	41
12.1.4 DFMC SBAS Network Open Service (OS-DFMC-DAS)	41
12.1.5 DFMC SBAS Observed Performance	41
13 PVS Open Service (OS-PVS-DAS).....	44
13.1.1 PVS Augmented Signal.....	44
13.1.2 PVS Open Service Coverage.....	44
13.1.3 PVS Open Service Reference Frame	44
13.1.4 PVS Network Open Service (OS-PVS-DAS)	44
13.1.5 PVS Observed Performance.....	45
14 GRE Observables (OS-GOBS)	46
15 SouthPAN End User receivers	47
Appendix A SINCA Description	48
A.1 SINCA Compression Algorithm	48
A.2 SINCA Decompression Algorithm	49

List of Figures

Figure 1: SouthPAN Early Open Services Coverage.....	15
Figure 2: SouthPAN System Architecture	16
Figure 3: Satellite Coverage for SouthPAN Early Open Services.....	17
Figure 4: DS2DC Client Architecture.....	23
Figure 5: General Structure of a DS2DC message	24
Figure 6: Types of DS2DC messages.....	24
Figure 7: General Structure of SouthPAN message	27
Figure 8: Evaluated Stations for Observed Performance.....	38
Figure 9: OS-L1-DAS availability (01/04/2025 - 30/06/2025). The solid black line is the 99.5% availability contour and the dashed white line is the OS-L1 service volume.....	40
Figure 10: OS-DFMC-DAS availability (01/04/2025 - 30/06/2025). The dashed white line is the OS-DFMC service volume.....	43
Figure 11: SINCA Compression Algorithm.....	48
Figure 12: Example of SINCA Compression	49
Figure 13: SINCA Decompression Algorithm	50
Figure 14: Example of SINCA Decompression	50

SBAS-STN-0002	D2023-53486	A5563666
Revision 02	9 April 2026	Page 6 of 51

List of Tables

Table 1: Relationship between services and navigation signals 14

Table 2: SouthPAN service architecture 15

Table 3: Key deployment milestones 18

Table 4: Data Access Overview 21

Table 5: SouthPAN L1 SBAS Message Types..... 28

Table 6: SouthPAN L5 SBAS Message Types..... 31

Table 7: OS-PVS MT32 resolutions 35

Table 8: OS-L1-DAS Performance Expectations 37

Table 9: OS-L1-SIS Observed Performance – (01/04/2025 - 30/06/2025)..... 38

Table 10: OS-DFMC-DAS Performance Expectations..... 41

Table 11: OS-DFMC-DAS Observed Performance – (01/04/2025 - 30/06/2025)..... 42

Table 12: OS-PVS-DAS IOC Performance Requirements..... 44

Table 13: OS-PVS-DAS FOC Performance Requirements 45

Table 14: OS-GOBS Ntrip Messages..... 46

SBAS-STN-0002	D2023-53486	A5563666
Revision 02	9 April 2026	Page 7 of 51

1 Introduction

1.1 Document identification

Project title	Southern Positioning Augmentation Network
GA Location	HPE Content Manager
GA Record ID	D2023-53486
LINZ Location	LINZone Objective
LINZ Record ID	A5563666

1.2 Document overview

Section	Section Heading	Section Description
2	Reference Documents	A list of documents referenced in the SDD-DAS
3	Executive Summary	An executive summary of SDD-DAS.
4	SouthPAN overview	A summary of the SouthPAN system architecture, the deployment strategy leading to its Full Operating Capability, and the organisational framework supporting its deployment and operations.
5	Connection Details	A synopsis of the key steps involved in configuring SouthPAN DAS connection
6	DAS Registration	A brief outline of the SouthPAN DAS registration process
7	DS2DC Client	An overview of DS2DC Client architecture
8	DS2DC Protocol	Comprehensive analysis of the DS2DC communication protocol: Message structure, categorization, and authentication sequence
9	SouthPAN DAS Message	In depth study of SouthPAN DAS message structure
10	SDAS Messages	Detailed analysis of SouthPAN SBAS service message types, parameters, and their significance in the scope of SBAS services
11	L1 SBAS Open Service (OS-L1-DAS)	A closer look at signal augmentation, coverage, reference frame, and performance metrics in L1 SBAS Open Service within SouthPAN
12	DFMC Open Service (OS-DFMC-DAS)	An extensive analysis of the SouthPAN DFMC SBAS service, with attention to its covered region, reference basis, and performance predictions.
13	PVS Open Service (OS-PVS-DAS)	Introduction to SouthPAN PVS augmented signalling and open service
14	GRE Observables (OS-GOBS)	This section is currently under development and will be updated with additional information in upcoming revisions of this document

SBAS-STN-0002	D2023-53486	A5563666
Revision 02	9 April 2026	Page 8 of 51

Section	Section Heading	Section Description
15	SouthPAN End User receivers	This section provides detailed insights into SouthPAN's certification status for safety-critical applications, emphasizing the strict adherence to DO-229F and associated standards for device compliance.
Appendix A	SINCA Description	A quick overview of the SINCA compression and decompression techniques in the context of SouthPAN DAS messages.

1.3 Document maintenance

This document is subject to change and will undergo review no later than one year after publication.

1.4 Purpose

GNSS equipment manufacturers, applications developers, and End-Users should use this document to implement the SouthPAN DAS from SouthPAN on their devices.

1.5 Terminology, acronyms, and abbreviations

1.5.1 Definitions

In this document, unless the contrary intention appears:

Aeronautical Radio Navigation Service means a radionavigation service intended for the benefit and for the safe operation of aircraft.

AUSCORS means the GNSS Continuously Operating Reference Station (CORS) Network operated by Geoscience Australia

Commonwealth of Australia includes its servants, agents, officers, representatives, and instrumentalities (however described).

Early Open Service means an Open Services provided before Final Operating Capability has been achieved (see Table 3).

End-User means any person who accesses or uses any of the End-User Services, or any person who accesses or uses goods or services that rely on the use of, or access to, the End-User Services. For the avoidance of doubt, an End-User includes any person who accesses or uses any of the End-User Services for the purposes of making goods or services available to one or more other persons.

End-User Services means any one or more of the Open Service, Safety-of-Life Service and the Aeronautical Radio Navigation Service.

Open Service means a SouthPAN service accessed or used by End-Users not engaged in operations where safety-of-life is at risk.

PositionNZ means the GNSS Continuously Operating Reference Station (CORS) Network operated by Toitū Te Whenua Land Information New Zealand

SBAS-STN-0002	D2023-53486	A5563666
Revision 02	9 April 2026	Page 9 of 51

Safety-of-Life Service means the SouthPAN service accessed or used by End-Users engaged in operations where safety-of-life is at risk.

SouthPAN means the Southern Positioning Augmentation Network.

Sovereign in Right of New Zealand includes its servants, agents, officers, representatives, and instrumentalities (however described).

1.5.2 Acronyms

BPSK means Binary Phase Shift Keying

CORS means Continuously Operating Reference Station

CPF means Correction Processing Facilities

DAS means Data Access Service

DC means Data Client

DFMC means Dual Frequency Multi Constellation

DFREI means Dual Frequency Range Error Indicator

DS means Data Server

DS2DC means Data Server to Data Client

EASA means European Union Aviation Safety Agency

ECEF means Earth Centred Earth Fixed

EU means End User

EUROCAE means the European Organisation for Civil Aviation Equipment

EUSPA means the European Union Agency for the Space Programme

FAA means Federal Aviation Administration

FEC means Forward Error Correction

FOC means Full Operating Capability

GA means Geoscience Australia

GCC means Ground Control Centres

GEO means Geostationary Earth Orbit

GRE means GNSS Reference Equipment

GRS means GNSS Reference Stations

GNSS means Global Navigation Satellite System

HPE means Horizontal Position Error

SBAS-STN-0002	D2023-53486	A5563666
Revision 02	9 April 2026	Page 10 of 51

IOC means Initial Operating Capability

IODG means Issue of Data GEO

IODN means Issue of Data Navigation

ITRF means International Terrestrial Reference Frame

LINZ means Toitū Te Whenua Land Information New Zealand

PNT means Position, Navigation, and Timing

PPP means Precise Point Positioning

PRN means pseudorandom noise

PVS means PPP Via SouthPAN

RAIM means Receiver Autonomous Integrity Monitoring

RHCP means Right Hand Circularly Polarised

RTCA means Radio Technical Commission for Aeronautics

SBAS means satellite-based augmentation system

SINCA means SISNeT Compression Algorithm

SIS means Signals-In-Space

SISNeT means Signal in Space through the Internet

SOL means Safety-of-Life

SWAN means SouthPAN Wide Area Network

UDREI means User Defined Range Error Indicator

UTC means Universal Time Coordinated

VPE means Vertical Position Error

WGS84 means World Geodetic System 1984

SBAS-STN-0002	D2023-53486	A5563666
Revision 02	9 April 2026	Page 11 of 51

2 Reference documents

Ref.	Code	Title	Publisher
[1]	DO-229F	Minimum Operational Performance Standards for Global Positioning System/Satellite-Based Augmentation System Airborne Equipment, Revision F	RTCA
[2]	ED-259 ¹	Minimum Operational Performance Standards for Galileo –Global Positioning System –Satellite-Based Augmentation System Airborne Equipment	EUROCAE
[3]	DO-401	Minimum Operational Performance Standards for Galileo –Global Positioning System –Satellite-Based Augmentation System Airborne Equipment	RTCA
[4]	IS-GPS-200M	NAVSTAR GPS Space Segment/Navigation User Interface Specification, Revision M	US DOD
[5]	IS-GPS-705H	NAVSTAR GPS Space Segment/User Segment L5 Interface Specification, Revision H	US DOD
[6]	OS-SIS-ICD_v2.0	European GNSS (Galileo) Open Service Signal-In-Space Interface Control Document, Issue 2.0	EUSPA
[7]	SBAS-STN-0001	Service Definition Document for Open Services, Revision 04	GA LINZ
[8]	E-RD-SYS-E31-010	SISNeT User Interface Document	European Space Agency

¹ ED-259 is the operative document, not to be confused with ED-259A.

SBAS-STN-0002	D2023-53486	A5563666
Revision 02	9 April 2026	Page 12 of 51

3 Executive summary

The Southern Positioning Augmentation Network (**SouthPAN**) provides augmentation services for United States Global Positioning System (**GPS**) and European Union Galileo, Global Navigation Satellite System (**GNSS**) constellations. SouthPAN can be used to improve the position, navigation, and timing for a broad range of users in Australia and New Zealand.

This version of the SouthPAN SouthPAN Service Definition Document for Data Access Services (**DAS**) is intended for use by GNSS equipment manufacturers, applications developers, and End-Users. It contains a description of the SouthPAN system architecture, structure and contents of the navigation messages, and indicative performance requirements for DAS.

This document will be updated in the future as DAS is improved, and new functionality is introduced.

SBAS-STN-0002	D2023-53486	A5563666
Revision 02	9 April 2026	Page 13 of 51

4 SouthPAN overview

SouthPAN is a satellite-based augmentation system (**SBAS**) broadcasting Signals-In-Space (**SIS**) and providing Data Access Services (**DAS**), jointly made available to End-Users free-of-charge by the Commonwealth of Australia as represented by Geoscience Australia (**GA**) and the Sovereign in Right of New Zealand as represented by Toitū Te Whenua Land Information New Zealand (**LINZ**).

SouthPAN is intended to provide improved Position, Navigation, and Timing (**PNT**) capabilities to End-Users in Australia and New Zealand. These capabilities will be made available to End-Users through their GNSS-enabled devices and dedicated internet services. End-Users may not necessarily be aware that the performance of their GNSS devices has been affected by SouthPAN.

Early Open Services will be provided to non-Safety-of-Life users as the infrastructure for the Safety-of-Life Service is deployed and certified.

SouthPAN will provide the Open Services via navigation Signals-In-Space and the internet, as described in Table 1.

Table 1: Relationship between services and navigation signals

Open Service	Description	Data Access Service
L1 SBAS	L1 SBAS Open Service (OS-L1), providing augmentation of the GPS L1 C/A signal.	L1 navigation data
DFMC SBAS	Dual Frequency Multi-Constellation (DFMC) SBAS Open Service (OS-DFMC), providing augmentation of the GPS L1 C/A, GPS L5, Galileo E1, and Galileo E5a signals.	DFMC navigation data
PPP via SouthPAN	Precise Point Positioning (PPP) via SouthPAN Open Service (OS-PVS), providing augmentation of the GPS L1 C/A, GPS L5, Galileo E1, and Galileo E5a signals. The PPP technique allows End-Users to achieve more accurate position compared to OS-DFMC.	PVS navigation data

See section 10 for further details of the different Open Services.

Figure 1 shows the service areas of the SouthPAN Open Services.

- OS-L1 covers mainland Australia and New Zealand; and
- OS-DFMC and OS-PVS cover both country's Exclusive Economic Zones.

4.1 Service Architecture

Table 2 depicts the relationship between SouthPAN's individual End-User services and groupings of services. These terms are used throughout the SDDs and in other SouthPAN documentation.

SBAS-STN-0002	D2023-53486	A5563666
Revision 02	9 April 2026	Page 14 of 51

Table 2: SouthPAN service architecture

SouthPAN Services			
Open Services			Safety-of-Life Services
L1 SBAS SIS	DFMC SBAS SIS	PVS SIS	L1 SBAS SIS
L1 SBAS DAS	DFMC SBAS DAS	PVS DAS	

SouthPAN services are defined in a series of Service Definition Documents (SDD):

- SBAS-STN-0001: SDD for Open Services SBAS-STN-0001 [7]—defines the SouthPAN Open Services L1 SBAS, DFMC SBAS, and PVS provided via the L1 and L5 navigation SIS transmitted by geostationary satellite.
- SBAS-STN-0002: SDD for Data Access Services—defines the SouthPAN Open Services L1 SBAS, DFMC SBAS, and PVS provided via the internet (this document).
- SBAS-STN-0003: SDD for Safety-of-Life Services—defines the SouthPAN L1 SBAS Safety-of-Life Service provided via the L1 navigation SIS transmitted by geostationary satellite(s) (future document).

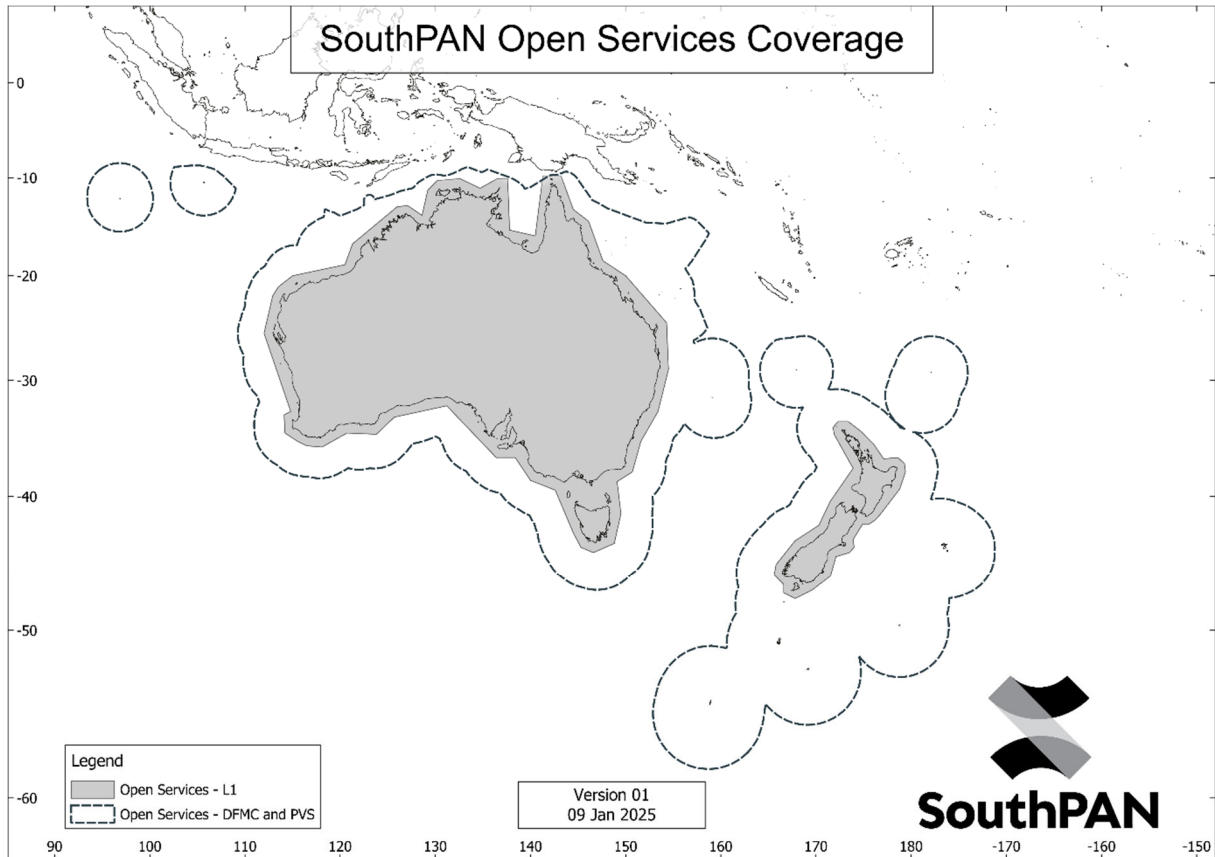


Figure 1: SouthPAN Early Open Services Coverage

SBAS-STN-0002	D2023-53486	A5563666
Revision 02	9 April 2026	Page 15 of 51

4.2 System architecture

SouthPAN uses a network of ground stations receiving GNSS signals. These are delivered to a computation centre, which generates corrections to reduce errors for GNSS (including satellite orbit, satellite clock offset, and ionospheric propagation delay). SouthPAN estimates residual errors that cannot be rectified and will independently monitor GNSS satellites to alert users of any faults.

The error corrections, residuals, and satellite health information are packaged in formats standardised in ICAO, RTCA, and EUROCAE documents. These are broadcast via Geostationary Earth Orbit (GEO) satellites and are available online. Users cannot use the SouthPAN GEO signals for ranging.

Figure 2 shows the end-to-end system architecture.



Figure 2: SouthPAN System Architecture

4.2.1 Ground facilities

SouthPAN ground facilities consist of a network of GNSS Reference Stations (**GRS**), Ground Control Centres (**GCC**) and Correction Processing Facilities (**CPF**). These are connected by the SouthPAN Wide Area Network (**SWAN**).

The SouthPAN GRS network will primarily comprise sites in Australia and New Zealand, with additional stations in Antarctica and foreign territories. The ground stations monitor navigation signals from the GPS and Galileo navigation satellite systems.

After the data delivered to the CPFs has undergone rigorous quality control checks, it is sent to the processing algorithms. These algorithms estimate the errors resulting from inaccuracies in the satellite orbits, satellite clocks, and signal bias models. The CPFs also assess the effect of the ionosphere on satellite signals.

SBAS-STN-0002	D2023-53486	A5563666
Revision 02	9 April 2026	Page 16 of 51

These error estimates, together with an estimation of the residual error, are transmitted to the users via the SouthPAN satellite and are also available on the internet.

Users can then use this information, with their measurements to obtain a position solution that has greater accuracy and integrity.

4.2.2 Space facilities

SouthPAN has a satellite uplink facility and satellites in geostationary orbit (**GEO**).

The satellite uplink facility receives the SouthPAN data streams from the CPF, generates the navigation signals, and sends the signals to the SouthPAN GEO satellite. The SouthPAN GEO acts as a "bent pipe"—translating the uplinked navigation signal to the L1 and L5 frequencies, then re-broadcasting without alteration.

Early Open Services primarily utilise one satellite payload in GEO. This first payload, positioned at 143.5°E, transmits data on both L1 (1,575.42 MHz) and L5 (1,176.45 MHz) frequencies with the PRN 122 identity..

Future satellites will be added to provide increased availability, as well as another navigation frequency, L5b (1,207.14 MHz). When complete, SouthPAN will use two satellites in GEO.

Early Open Services use two dedicated uplink facilities located in Uralla, Australia, and Awarua, New Zealand, to transmit the data stream to the geostationary satellites. These uplink facilities provide redundant support for each other. This arrangement reduces interruption to the service and enhances operational reliability.

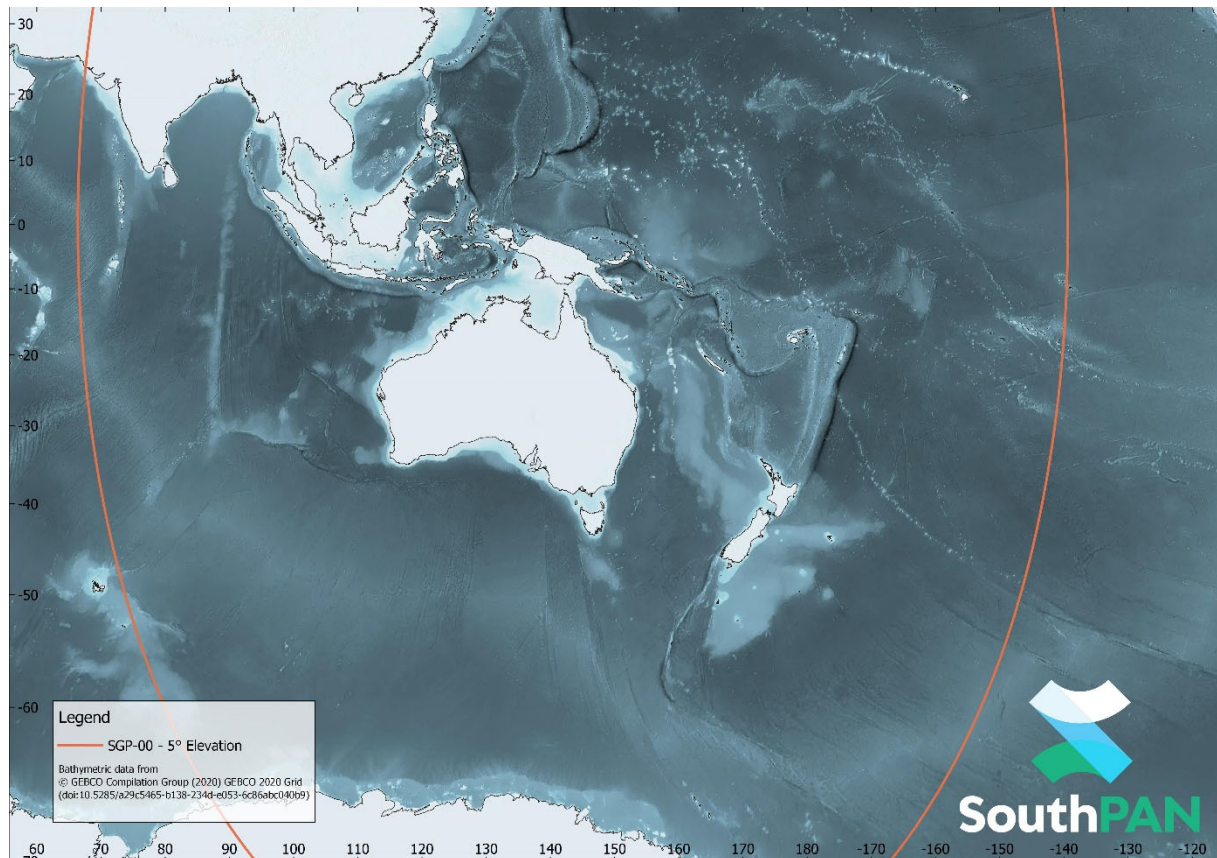


Figure 3: Satellite Coverage for SouthPAN Early Open Services

SBAS-STN-0002	D2023-53486	A5563666
Revision 02	9 April 2026	Page 17 of 51

4.2.3 Data Access Facilities

SouthPAN has server infrastructure to provide Data Access Services via the internet. SouthPAN data is transferred from the CPF to these servers for dissemination to users. These are hosted on high availability cloud infrastructure and provide access using the methods described in the SouthPAN Service Definition Document for Data Access Services (this document).

4.3 Deployment strategy

The Open Service is available for non-Safety-of-Life (SOL) users while the infrastructure for the SOL service is deployed and certified. The key deployment milestones are described in Table 3.

Table 3: Key deployment milestones

Milestone	Description	Comment
Initial Operating Capability-95	Commencement of Early Open Services using existing infrastructure. Open Services only.	Q3 2022
Initial Operating Capability-99.5	Additional infrastructure will be integrated into the SouthPAN system, improving accuracy and availability. Open Services only.	Q1 2024
Initial Operating Capability-99.9	Additional infrastructure will be integrated into the SouthPAN system, improving accuracy and availability. Open Services only.	Late 2026 (indicative)
Initial Operating Capability-99.9 with Safety-of-Life Services	Following a safety assessment, SouthPAN services will be certified for use in Safety-of-Life applications. Open Services and Safety-of-Life Services.	Early 2028 (indicative)
Full Operating Capability	The final satellite will be integrated into the SouthPAN system, providing the maximum level of service availability. Open Services and Safety-of-Life Services.	Mid 2031 (indicative)

Planned infrastructure developments include:

- Dedicated GRS for SouthPAN in New Zealand and Australia will be deployed. Each GRS will consist of redundant GNSS receivers that will be connected to the CPFs through a dedicated, redundant communication network (SWAN). Initially, SouthPAN will use data from the AUSCORS² and PositionNZ³ GNSS Continuously Operating Reference Station (**CORS**) networks.
- Future satellites in GEO with enhanced features, including an additional navigation signal at L5b (1,207.14 MHz), will be added to the system. The PVS Open Service will migrate from L5 to L5b. Users will be advised of changes to PRN codes and dates for activating the new service.
- A new data format will enable PPP via the SouthPAN (PVS) service on the L5b navigation signal, providing improved accuracy and faster convergence times. The PVS Open Service

² <https://gnss.ga.gov.au/stream>

³ <https://www.linz.govt.nz/data/geodetic-services/positionnz>

SBAS-STN-0002	D2023-53486	A5563666
Revision 02	9 April 2026	Page 18 of 51

will migrate from L5 to this third navigation signal. Users will be advised of changes to PRN codes and dates for activating the new service.

Each of the Early Open Services will be improved over the deployment period. During this Initial Operating Capability (**IOC**) phase, Open Service performance attributes such as accuracy and availability are expected to improve as additional infrastructure is established.

This SDD will be regularly updated throughout the deployment period.

4.4 Organisational framework

4.4.1 Roles & Responsibilities

The SouthPAN Program is a joint undertaking between Australian and New Zealand Governments. The operational organisations responsible are GA and LINZ.

4.4.2 Further information and support

Organisation	Webpage	Email
Geoscience Australia	www.ga.gov.au/southpan	clientservices@ga.gov.au
Toitū Te Whenua Land Information New Zealand	www.linz.govt.nz/southpan	southpan@linz.govt.nz

SBAS-STN-0002	D2023-53486	A5563666
Revision 02	9 April 2026	Page 19 of 51

5 Connection Details

5.1 DAS

To encourage uptake and interoperability, SouthPAN DAS has been developed to be compliant with the SISNeT protocol provided by the EGNOS Data Access Service (EDAS). For consistency, the nomenclature of components has been maintained (such as DS2DC and SINCA).

This section offers essential details for configuring the connection settings required for SouthPAN DAS messages.

Hostname/Static IP Addresses:

sisnet.data.gnss.ga.gov.au

13.239.151.7 / 54.153.169.141 / 3.104.99.86

User/Password:

Provided upon registration – see Section 6.1.

Service Connection Details:

Each of the services will be provided on two ports to maximise service availability. End-Users may choose to use one or both of the ports to access the services depending on their own availability requirements. Navigation solutions may vary marginally between each port, and should End-Users need to change from one port to the other then some discontinuity in position and time may be apparent.

5.2 OS-GOBS

The Geoscience Australia AUSCORS NTRIP Broadcaster provides free and open access to real-time GNSS data streams from each GRE in each GRS. The AUSCORS NTRIP Broadcaster also provides access to all Continuously Operating Reference Stations (CORS) which belong to the National Positioning Infrastructure Capability (NPIC) and Asia-Pacific Reference Frame (APREF) projects.

Hostname:

ntrip.data.gnss.ga.gov.au

User/Password:

Provided upon registration – see Section 6.2.

Service Connection Details:

The connection to each GRE will be through mountpoints with the following format: SSSS00CCC0
Where:

SSSS is the 4-Character Site ID

CCC is the ISO country code

Example: Halls Creek GRE 1, Australia is **SHC100AUS0**

SBAS-STN-0002	D2023-53486	A5563666
Revision 02	9 April 2026	Page 20 of 51

Table 4: Data Access Overview

Service	Protocol	Format	Ports	Notes
OS-L1-DAS	DS2DC/SISNeT	RTCA DO-229D	61001, 62001	See Section 10
OS-DFMC-DAS	DS2DC/SISNeT	EUROCAE ED-259/ DO-401	61005, 62005	See Section 10
OS-PVS-DAS	DS2DC/SISNeT	EUROCAE ED-259/ DO-401 (MT32)	61005, 62005	See Section 10
OS-GOBS	Ntrip v2.0	RTCM 3.x	443 (secure TLS), 2101 (not secure)	See Section 14

SBAS-STN-0002	D2023-53486	A5563666
Revision 02	9 April 2026	Page 21 of 51

6 Registration

6.1 DAS

SouthPAN DAS access is available upon registration. To request a DAS account, users must send an email request to the SouthPAN DAS provider at gnss@ga.gov.au with their preferred username, and the DAS provider will provide the corresponding password to the user.

6.2 OS-GOBS

The AUSCORS NTRIP Broadcaster is available upon registration from the following website:
<https://gnss.ga.gov.au/stream>.

SBAS-STN-0002	D2023-53486	A5563666
Revision 02	9 April 2026	Page 22 of 51

7 DS2DC Client

Figure 4 illustrates the architecture of the DS2DC client. In this diagram, boxes denote various functional components, while ellipses represent different pieces of information. The blue ellipses specifically signify the output data generated by the DS2DC client.

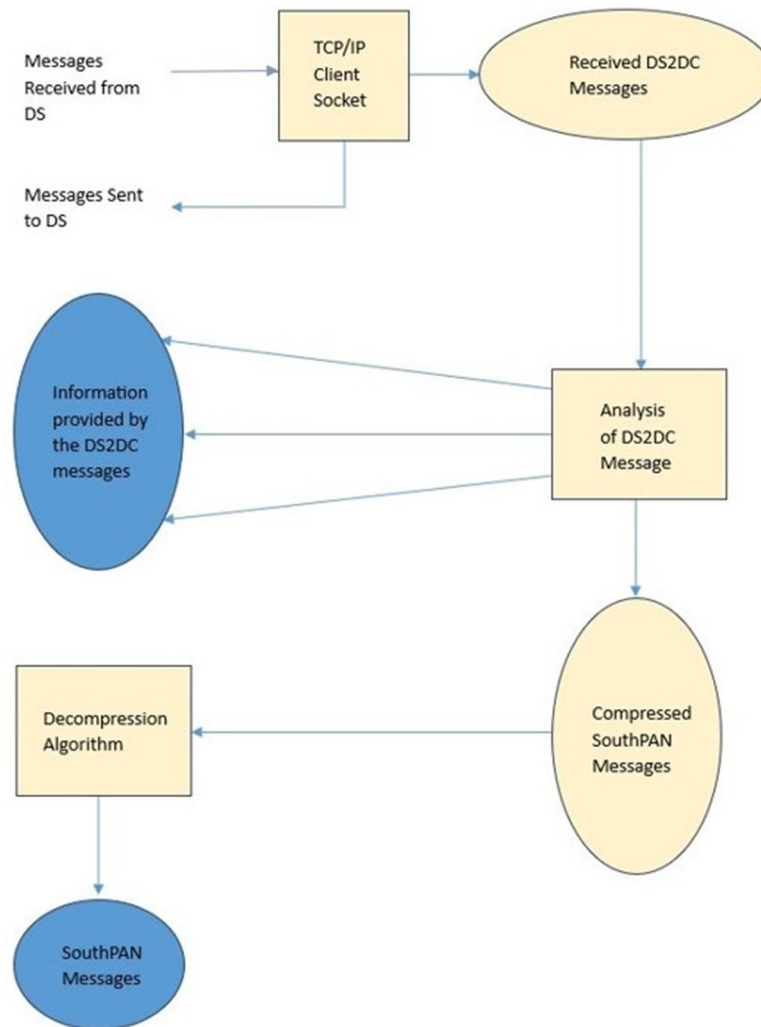


Figure 4: DS2DC Client Architecture

The architecture of the DS2DC client comprises the following functional blocks:

- **TCP/IP Client Socket (TCS):** This component is responsible for establishing a TCP/IP connection with the Data Server (DS). It utilises a pre-defined IP address and port to facilitate the exchange of text messages with the DS. It handles both sending messages to the DS and receiving responses from the DS.
- **Analysis of DS2DC Messages (ADM):** This block plays a crucial role in analysing the content of messages received from the DS. Its primary function is to extract and convert the information contained in these messages into a user-friendly and readily processable format.
- **Decompression Algorithm (DA):** The DS employs a compression algorithm named SINCA to compress SouthPAN DAS messages before transmitting them to users. A detailed explanation of the SINCA algorithm is presented in Appendix A.

These functional blocks collectively constitute the core of the DS2DC client's architecture, facilitating the user's ability to establish connections and receive up to date SouthPAN DAS messages.

SBAS-STN-0002	D2023-53486	A5563666
Revision 02	9 April 2026	Page 23 of 51

8 DS2DC Protocol

8.1 Fundamentals of the SouthPAN DS2DC protocol

The information in this section is based on [RD7]. The communication protocol utilised between the Data Server (DS) and the Data Client (DC) is referred to as DS2DC. The DS2DC protocol operates with text strings, which are transmitted directly via the TCP/IP protocol by activating a socket connection between the DC and DS. These text strings are commonly referred to as "DS2DC messages." Each DS2DC message consists of text fields separated by commas. Each field contains specific information within the message. The first field is an uppercase text label that serves to identify the purpose of the DS2DC message, called the "Message Name." Figure 5 provides an illustration of the general structure of a DS2DC message.

Message Name	,	Field 1	,	Field 2	,	...	,	Field N-1	,	Field N	<LF> or <CR><LF>
--------------	---	---------	---	---------	---	-----	---	-----------	---	---------	------------------

Figure 5: General Structure of a DS2DC message

Note that every message in the DS2DC protocol must conclude with one of the following:

- A line feed (LF) character
- A carriage-return character followed by a line feed character (CRLF)

Depending on their direction, DS2DC messages can be categorized into two main groups:

- Messages from End User (EU) to the DS: These messages, in line with SISNeT terminology, are referred to as R-Messages or RMs. They often serve to request specific services from the DS and are commonly known as "DS2DC messages." The names of these messages always commence with an alphabetic character.
- Messages from the DS to the End User (EU): As per SISNeT terminology, these messages are called S-Messages or SMs. These messages typically start with an asterisk (*) character, followed by the message name being responded to. For instance, if an RM is named 'AUTH,' the corresponding SM would be '*AUTH.'

The classification of DS2DC messages is depicted in Figure 6 for reference.

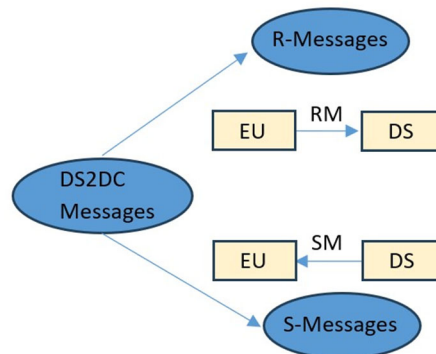


Figure 6: Types of DS2DC messages

SBAS-STN-0002	D2023-53486	A5563666
Revision 02	9 April 2026	Page 24 of 51

8.2 Available DS2DC Messages in SouthPAN

The list below explains the purposes of certain DS2DC messages in SouthPAN.

- R – Messages:
 - AUTH: This R-Message (RM), in the format provided below, enables the implementation of an essential authentication process. This process is a prerequisite for any interaction with the DS. For further information on this process, see Section 8.3.
 - START: This RM enables the user to continuously receive SouthPAN DAS messages from the data server until a STOP message is sent.
 - STOP: This RM is utilised when the user intends to cease receiving SouthPAN DAS messages following the transmission of the START message.
- S – Messages:
 - *AUTH: A positive response to an authentication message (AUTH), signifying that the DC Client is granted permission to engage with the DS.
 - *START: This response corresponds to the START message and is consistently followed by the reception of SouthPAN DAS messages.
 - *STOP: This response indicates that the continuous reception of SouthPAN DAS messages has been halted in response to the STOP message.
 - *ERR: In cases where the user is not authorized, an error message will be transmitted resulting in access being denied.

8.3 The Authentication Process

Once a connection to the Data Server is established, the client socket must engage in an authentication dialogue with the DS within a 10-second timeframe to gain authorization for service access. As described in Section 8.2, the authentication protocol relies on the utilization of the "AUTH" R-Message and its associated "*AUTH" S-Message. The comprehensive sequence of actions is as follows:

- The DS2DC Client initiates a connection with the DS.
- Subsequently, the DS2DC Client dispatches an AUTH message in the specified format, which contains private credentials corresponding to a valid account, namely, a username and password.

Format:

AUTH	,	User	,	Password
------	---	------	---	----------

Fields:

Field	Comments
AUTH	The message name
User	Username corresponding to valid SISNeT account
Password	The corresponding password

- If the authentication data matches a valid account, the Data Server will respond with an *AUTH message in the format provided, granting access to the DS. Subsequently, the DC client can initiate its regular interaction with the DS using the START RM.

SBAS-STN-0002	D2023-53486	A5563666
Revision 02	9 April 2026	Page 25 of 51

Format:

*AUTH

Fields:

Field	Comments
*AUTH	The message name

SBAS-STN-0002	D2023-53486	A5563666
Revision 02	9 April 2026	Page 26 of 51

9 SouthPAN DAS Message

The End-User will receive the most recent SouthPAN DAS messages by using the 'START' R-message. The response to the START message is the *START S-message, and this response is consistently followed by the reception of SouthPAN DAS messages in the provided format until a 'STOP' R-message is transmitted.

Format:

*MSG	,	GPS Week	,	GPS Time	,	SINCA Compressed SouthPAN Message
------	---	----------	---	----------	---	-----------------------------------

Fields:

Field	Comments
*MSG	The message identity
GPS Week	The GPS week corresponding to the SouthPAN message
GPS Time	The GPS time of week in seconds corresponding to the SouthPAN message
SouthPAN Message	The SouthPAN message in SINCA format (see Section Appendix A)

In order to enhance communication speed, the Data Server employs the SISNeT Compression Algorithm (SINCA). Users are required to apply a decompression technique to retrieve the original SouthPAN DAS messages. For comprehensive details regarding the SINCA compression and decompression process, please refer to Section Appendix A.

*MSG,2285,174219,9A120|940040040040040/113B9BBB380|530DF2B40*3A

GPS Week GPS Time SINCA Compressed SouthPAN Message Checksum

Figure 7: General Structure of SouthPAN message

SBAS-STN-0002	D2023-53486	A5563666
Revision 02	9 April 2026	Page 27 of 51

10 DAS Messages

10.1 OS-L1-DAS Messages

10.1.1 List of Message Types

SouthPAN will transmit the L1 SBAS navigation messages defined in Table 5 below. An abridged description is provided, along with notes and special conditions that End-Users may require to achieve maximum performance. The complete message definition is in RTCA DO-229F [1].

Table 5: SouthPAN L1 SBAS Message Types

Message Type	Contents	Purpose	Notes
0	During development contains MT2 data	Don't use for safety of life applications	During SouthPAN Early Open Services, the L1 SBAS navigation signal must not be used for Safety-of-Life applications. Hence, SouthPAN will make use of the MT0/2 strategy as described in DO-229F [1] section A.4.4.1. SouthPAN will not broadcast MT2 and instead include MT2 data in MT0 messages. This indicates to SOL users (for instance, aircraft) that SouthPAN cannot be used for SOL applications (for example, to land at an airport).
1	PRN Mask Assignments	Identity of GNSS satellites to be augmented	GEO PRN 122 is currently included in the MT1 mask.
2-5	Fast Corrections	Range corrections and accuracy	During SouthPAN Early Open Services, the MT2 message is broadcast using the MT0/2 approach (see MT0 entry in this table). The transmission of MT0/2 achieves the same outcome as transmitting “Do Not Use” or “Not Monitored” in the UDREI, and explicitly protects the continuity of navigation for RAIM users that receive the L1 SBAS signal. SouthPAN may broadcast UDREI with “Do Not Use” values but will minimise their use to meet performance requirements.

SBAS-STN-0002	D2023-53486	A5563666
Revision 02	9 April 2026	Page 28 of 51

Message Type	Contents	Purpose	Notes
6	Integrity Information	Accuracy-bounding information for all satellites in one message	The transmission of MT0/2 achieves the same outcome as the “Do Not Use” UDREI approach, and explicitly protects the continuity of navigation for RAIM users that receive the L1 SBAS signal. SouthPAN may broadcast UDREI with “Do Not Use” values but will minimise their use to meet performance requirements.
7	Fast Corrections Degradation Factor	Information about the degradation of the fast corrections	
10	Degradation Factor	Information about the correction degradation upon message loss	
25	Long Term Satellite Error Corrections	Corrections for satellite ephemeris and clock errors for up to four satellites	The Long-Term Correction messages will usually use the “Velocity Code=0” approach, allowing the inclusion of corrections for four satellites in each MT25 message. Depending on the number of satellites monitored and the convergence status of the system, some of the correction slots might be left empty by referring to “zero” in the PRN Mask Number field.
24	Mixed fast Corrections/ Long Term Satellite Error Corrections	Fast-term error corrections for up to six satellites and long-term satellite error corrections for up to two satellites in one message	SouthPAN may be configured to use MT4 with less than seven active satellites, rather than broadcasting MT24. If the “Velocity Code=0” approach is used (as defined for MT25) the long-term corrections for two satellites will be included in each MT24.
18	Ionospheric Grid point Mask	Indicates for which geographical point ionospheric correction data is provided	
26	Ionospheric Delay Corrections	Vertical delays/accuracy bounds at given geographical points	

SBAS-STN-0002	D2023-53486	A5563666
Revision 02	9 April 2026	Page 29 of 51

Message Type	Contents	Purpose	Notes
9	GEO Navigation	SouthPAN GEO satellites orbit information (ephemeris)	SouthPAN will not support GEO ranging. MT9 will be populated as follows: - XG and YG are populated with the coordinates of the reference position of the GEO. ZG parameter is set to zero. - URA is set to 15. - Velocity parameters XG, YG and ZG rate-of-change are set to zero. - Acceleration Parameters XG, YG and ZG acceleration are set to zero. - Clock parameters AGF0 and AGF1 are set to zero. GEO Satellite is always set to Not Monitored by the SBAS augmentation at messages MT2-5, and MT6.
17	GEO Almanac	SouthPAN GEO satellites Almanacs	SouthPAN will not support GEO ranging. MT17 will be populated as follows: - Health and Status word indicates the Ranging function is "Off" (Bit 0 set to 1). - Health and Status word indicates that the Service Provider is SouthPAN ('8') (Bits 4-7 set to 1000) - X_G and Y_G are populated with the coordinates of the reference position of the GEO. Z_G parameter is set to zero. - Velocity parameters X_G, Y_G and Z_G rate-of-change are set to zero.
27	SBAS Service	Defines the geographic region of the service	SouthPAN will use MT27 to define the geographic service area during Early Open Services. In the future, MT28 will be used and MT27 will not be used.
62	Internal Test Message		MT62 will be broadcast approximately every 700 to 1000 seconds for internal testing purposes only. It will not carry information for use by SouthPAN users.
63	Null Message	Placeholder message if no other message is available	MT63 may be a placeholder message if no other message is scheduled. It will not carry information for use by SouthPAN users.
12	SBAS Network Time/UTC Parameters	Parameters for synchronisation of SouthPAN Network time with UTC	All MT12 fields are set to zero, except UTC Standard Identifier which is set to '7' (UTC not provided). SouthPAN is not connected to a reference time laboratory, and this message does not indicate the UTC/SouthPAN Network Time scale offset.

SBAS-STN-0002	D2023-53486	A5563666
Revision 02	9 April 2026	Page 30 of 51

10.2 OS-DFMC-DAS Messages

10.2.1 List of Message Types

SouthPAN will transmit the L5 SBAS navigation messages below. An abridged description is provided, along with notes and special conditions that SouthPAN users may require to achieve maximum performance. The complete message definition is contained in ED-259 [2] and DO-401 [3]. For the avoidance of doubt, the message definition is contained in ED-259 *not* ED-259A.

Table 6: SouthPAN L5 SBAS Message Types

Message Type	Contents	Purpose	Notes								
0	Do Not Use for Safety Applications		Following a similar approach to the MT0/2 strategy used for the L1 SBAS Early Open Service, the L5 DFMC MT0 message will be used to transmit the integrity information from messages MT34, 35 or 36.								
31	PRN Mask Assignments	List of satellites to be augmented	GEO PRN 122 is currently included in the MT31 mask.								
34, 35, 36	Integrity information (DFREI and DFRECI)	Accuracy-bounding information for all satellites in one message	The Message Type ID on the integrity messages for the SouthPAN early DFMC service is always set to “0”, meaning that the integrity information is broadcast within the “Do Not Use for Safety Applications” message. This is a similar approach to the one used in DO-229F [1] for MT0/2 messages in the L1 SBAS Open Service. Spare bits of the message, in positions 222 & 223, will be used as an identifier signifying the type of integrity data contained within the nominal MT0 as follows: <table><tr><th>Bits 222 & 223</th><th>Integrity Message ID</th></tr><tr><td>01 (int =1)</td><td>MT34</td></tr><tr><td>10 (int =2)</td><td>MT35</td></tr><tr><td>11 (int =3)</td><td>MT36</td></tr></table>	Bits 222 & 223	Integrity Message ID	01 (int =1)	MT34	10 (int =2)	MT35	11 (int =3)	MT36
Bits 222 & 223	Integrity Message ID										
01 (int =1)	MT34										
10 (int =2)	MT35										
11 (int =3)	MT36										

SBAS-STN-0002	D2023-53486	A5563666
Revision 02	9 April 2026	Page 31 of 51

Message Type	Contents	Purpose	Notes
32	Satellite clock-ephemeris error corrections and covariance matrix	Error estimates for slow varying GNSS satellite ephemeris and clock errors	SouthPAN will not use MT32 to broadcast information for the SouthPAN geostationary satellites.
39, 40	SBAS satellites ephemeris and covariance matrix	Error estimates for slow varying SBAS satellite ephemeris and clock errors	SouthPAN will not support GEO ranging. Only the message header and Keplerian parameters are populated with non-dummy values, as follows: - Satellite slot Delta (in MT39) is filled with the transmitting satellites delta GEO slot according to MT31. - IODG (in MT39). - Service Provider ID (in MT39) is set to 8. - Keplerian parameters (in MT39 and MT40) are filled with orbital parameters for SGP-01 satellite. - the parameter (in MT40) is populated with T_{oe} corresponding to the message transmission. - DFREI (in MT40) is always set to 15, meaning "Not for use in SBAS mode". All the other fields (clock and covariance parameters) in message 40 are set to dummy zero. The accuracy of the Keplerian parameters is expected to be coarse (in the order of tens of kilometres) but enough to allow an approximate computation of the signal Doppler. SouthPAN GEO Satellites are always set to Not Monitored.
37	Degradation parameters and DFREI scale table	Information about the correction degradation upon message loss	The time reference identifier is always set to 0 to indicate GPS.
47	Almanacs of SBAS Satellites	SBAS GEO satellites almanacs	Only SBAS I almanac section is populated with non-dummy values: - Satellite slot Delta (in MT47) is filled with PRN122 delta GEO slot according to MT31. - SBAS Provider ID (in MT47) is set to 8. - Ownership Indicator (in MT47) is set to one. - Keplerian parameters (in MT47) are populated with orbital parameters for SGP-00 satellite. - t_a parameter (in MT47) is populated with the second in day corresponding to the time message transmission. All the fields in the messages 47 in SBAS II section are set to dummy zero.

SBAS-STN-0002	D2023-53486	A5563666
Revision 02	9 April 2026	Page 32 of 51

Message Type	Contents	Purpose	Notes
42	SBAS Network Time/UTC	Parameters for synchronisation of SBAS Network time with UTC	This message is declared as RESERVED in ED-259 [2] and DO-401 [3]. Field UTC Standard identifier is set to 7, indicating that UTC is not provided. All the other parameters into the Common parameter's sections are set to dummy zero. GPS and Galileo offset (relative to SBAS Network Time) are set to zero. A Time Service is not provided. The objective of this message is to provide a time synchronization system. However, its information is not needed for the SBAS DFMC service or the application of the corrections information. Users are to ignore this MT in processing.
62	Internal SBAS L5 test message		This message is broadcast approximately every 700-1000 seconds for internal testing purposes. It does not carry information to be acquired or used by the DFMC SBAS users.
63	SBAS L5 null message	Filler message if no other message is available	This message will be used as a placeholder if no other message is available for broadcast. It does not carry information to be acquired or used by the L5 SBAS users. SouthPAN early DFMC Services may broadcast MT63 messages with the contents bits set to values different from zero as part of the system broadcast initialisation sequence.

SBAS-STN-0002	D2023-53486	A5563666
Revision 02	9 April 2026	Page 33 of 51

10.2.2 Time-out table

SouthPAN Early Open Services use a dynamic scheduling algorithm to optimise the DFMC SBAS message sequence for efficient usage of the available bandwidth. Maximum Update Intervals are implemented as per ED-259 [2] and DO-401 [3].

The effective update rate is increased for the MT31 message and MT32 messages to improve time to first fix and support high accuracy position solutions by refreshing the information more frequently than the Maximum Update Interval. Additionally:

- MT62 has a Maximum Update Interval of 1000 seconds.
- MT42 has a Maximum Update Interval of 240 seconds.

10.2.3 Ephemeris Navigation Database

ED-259 [2] and DO-401 [3] state that the receiver shall use a navigation database with the last three broadcast navigation messages for GPS and the last four broadcast navigation messages for Galileo.

We recommended receiver manufacturers extend the length of their navigation database. This will improve the robustness of the calculated solutions.

10.2.4 User Smoothing Time

The performance of the SouthPAN DFMC SBAS Open Service is based on the presumption that the user will implement an ionosphere-free code-carrier smoothing filter with a characteristic time of 600 seconds.

End-Users may choose a different characteristic time due to their operational environment (for example, 100 seconds to cope with regular satellite loss-of-lock) however this may impact positioning performance.

SBAS-STN-0002	D2023-53486	A5563666
Revision 02	9 April 2026	Page 34 of 51

10.3 OS-PVS-DAS Messages

10.3.1 PVS corrections within the DFMC SBAS navigation messages

MT32 DFMC SBAS corrections fields are a vehicle for the transmission of the PVS corrections. The resolution of the MT32 corrections allow for the accuracies described in Table 7: OS-PVS MT32 resolutions.

Table 7: OS-PVS MT32 resolutions

Parameter	Bit Length	Resolution	Max Error	Use
Satellite Slot Number	8	1	n/a	DFMC SBAS & PVS
IODN	10	1	n/a	DFMC SBAS & PVS
δx (ECEF)	11	0.0625 m	0.03125 m	DFMC SBAS & PVS
δy (ECEF)	11	0.0625 m	0.03125 m	DFMC SBAS & PVS
δz (ECEF)	11	0.0625 m	0.03125 m	DFMC SBAS & PVS
δB	12	0.03125 m	0.015625 m/s	DFMC SBAS & PVS
δx rate-of-change (ECEF)	8	0.00048828 m/s	0.00024414 m/s	DFMC SBAS & PVS
δy rate-of-change (ECEF)	8	0.00048828 m/s	0.00024414 m/s	DFMC SBAS & PVS
δz rate-of-change (ECEF)	8	0.00048828 m/s	0.00024414 m/s	DFMC SBAS & PVS
δB rate-of-change	9	0.00024414 m/s	0.00012207 m/s	DFMC SBAS & PVS
Time of applicability, t_D	13	16 secs	n/a	DFMC SBAS & PVS

The MT32 time of applicability field indicates whether the corrections are used for DFMC SBAS-only or DFMC SBAS and PVS. By message format, the Time of Applicability is always a multiplier of 16. The parity of $t_D/16$ indicates the MT32 correction usability:

- Odd Value - $\text{Mod}(t_D/16, 2) == 1$: The correction is applicable to both DFMC SBAS and PVS users.
- Even Value - $\text{Mod}(t_D/16, 2) == 0$: The correction is applicable only to DFMC SBAS users.

The MT32 corrections use the same equations that ED-259 [2] and DO-401 [3] define for DFMC SBAS.

The End-User is not required to decode the MT31 to use the OS-PVS, as the MT32 message already includes the PRN number itself at the Satellite Slot Number.

SBAS-STN-0002	D2023-53486	A5563666
Revision 02	9 April 2026	Page 35 of 51

10.3.2 Applicability of Corrections

The performance of the SouthPAN PVS Open Service is based on the presumption that the applicability time of the corrections is 100 seconds since the time of reception of the relevant MT32.

The applicability time must be measured since the time of reception of the SBAS message and not since the time of applicability field t_b .

The update interval of the MT32 corrections in the DFMC SBAS sequence is increased to improve the high accuracy corrections validity.

SBAS-STN-0002	D2023-53486	A5563666
Revision 02	9 April 2026	Page 36 of 51

11 L1 SBAS Open Service (OS-L1-DAS)

11.1.1 L1 SBAS Open Service Augmented Signal

The SouthPAN L1 SBAS service augments the GPS L1 C/A signal defined by IS-GPS-200M [4] in accordance with RTCA DO-229F [1].

11.1.2 L1 SBAS Open Service Coverage

OS-L1 coverage is shown in Figure 1: SouthPAN Early Open Services Coverage.

11.1.3 L1 SBAS Open Service Reference Frame

OS-L1 corrections are provided relative to WGS84 in accordance with DO-229F [1].

11.1.4 L1 SBAS Network Open Service (OS-L1-DAS)

OS-L1-DAS is the L1 SBAS Open Service delivered via SouthPAN DAS. This is not for a Safety-of-Life Service.

It has the following indicative performance expectation.

Table 8: OS-L1-DAS Performance Expectations

Performance Measure	Target
Horizontal Position Error (HPE) (95%)	≤ 3 metres
Vertical Position Error (VPE) (95%)	≤ 4 metres
Service Availability	≥ 0.995

11.1.5 L1 SBAS Observed Performance

The OS-L1-DAS performance has been calculated and shown in this section for a subset of AUSCORS and PositionNZ stations depicted in Figure 8. The time period observed is the second quarter of the 2025 calendar year (1 April – 30 June 2025). Data was collected from the AUSCORS and PositionNZ reference stations and processed using SouthPAN corrections to determine a position for each second.

SBAS-STN-0002	D2023-53486	A5563666
Revision 02	9 April 2026	Page 37 of 51

Evaluated Stations

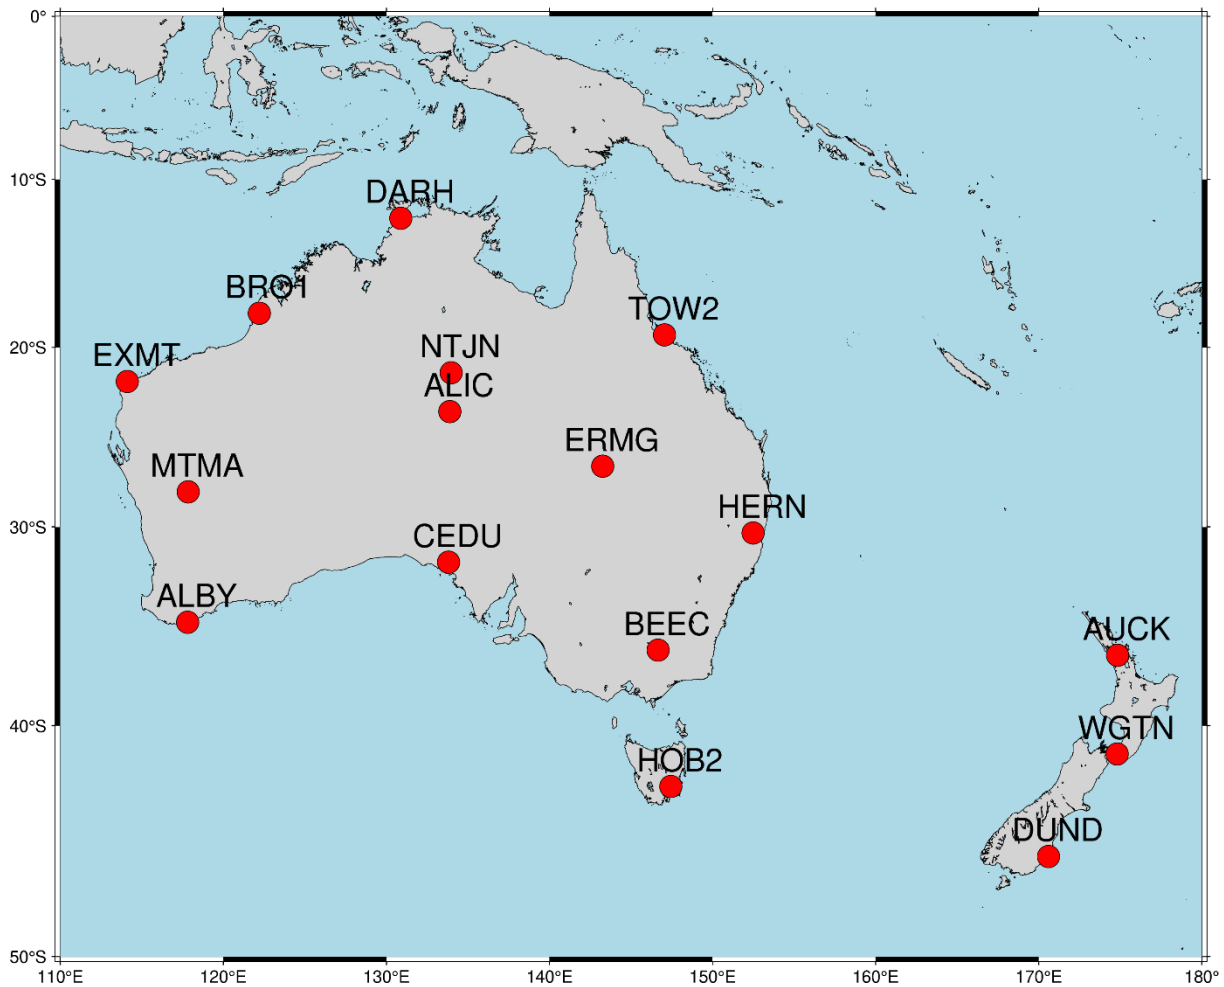


Figure 8: Evaluated Stations for Observed Performance

11.1.5.1 OS-L1-DAS Positional Errors

Table 9 shows the OS-L1-DAS horizontal and vertical error for the evaluated stations. The error has been calculated as the difference between the instantaneous calculated position and the surveyed position.

Table 9: OS-L1-SIS Observed Performance – (01/04/2025 - 30/06/2025)

Location	Horizontal Error (95%) (m)	Vertical Error (95%) (m)	No. Samples
AUCK	0.98	1.49	7828984
ALBY	1.29	1.32	7835606
ALIC	1.02	2.61	7834275
BEEC	1.09	1.36	7828322
BRO1	1.99	2.81	7837650
CEDU	0.94	1.55	7720478
DARH	3.79	2.84	7843679

SBAS-STN-0002	D2023-53486	A5563666
Revision 02	9 April 2026	Page 38 of 51

Location	Horizontal Error (95%) (m)	Vertical Error (95%) (m)	No. Samples
DUND	0.87	1.39	7830369
ERMG	0.83	1.97	6984197
EXMT	1.47	1.92	7825490
HERN	0.89	1.79	7831559
HOB2	1.38	1.42	7838992
MTMA	1.00	1.55	7843262
NTJN	1.15	2.72	7698112
TOW2	0.92	2.2	4997469
WGTN	0.75	1.3	7825305

All stations pass the performance expectations except for the horizontal component of DARH. This is due to the high ionospheric activity causing an uneven ionosphere which is extremely difficult to model. However, the corrections that are applied drastically improve the position, from an approximate 95th percentile horizontal error of 15m down to 3.8m. Other northern sites are also likely to experience the same difficulties.

11.1.5.2 OS-L1-DAS Availability

The availability of the system has been computed as the capability of the user to compute an SBAS-aided position. This is defined as the user having at least 4 usable satellites that are visible and monitored by SouthPAN.

Figure 9 shows the availability of the service. The entire service area passes the availability requirement.

SBAS-STN-0002	D2023-53486	A5563666
Revision 02	9 April 2026	Page 39 of 51

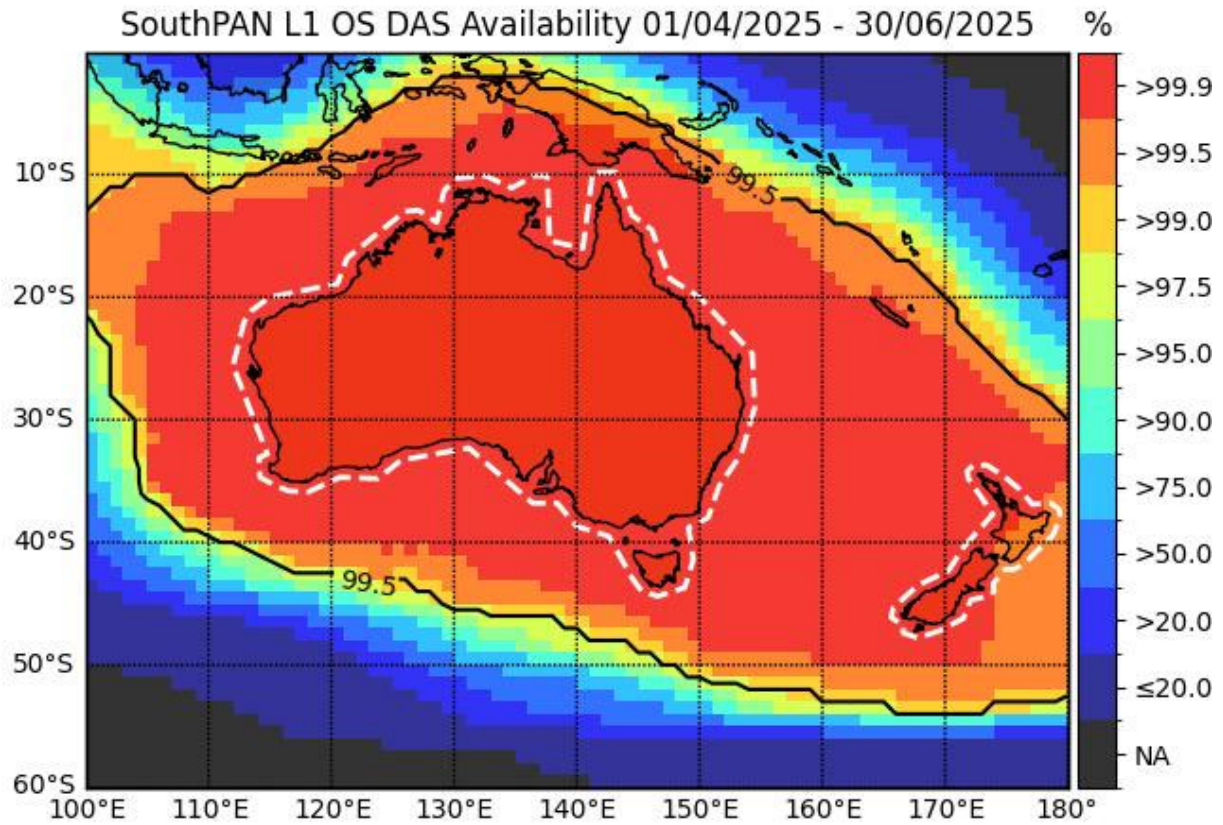


Figure 9: OS-L1-DAS availability (01/04/2025 - 30/06/2025). The solid black line is the 99.5% availability contour and the dashed white line is the OS-L1 service volume.

SBAS-STN-0002	D2023-53486	A5563666
Revision 02	9 April 2026	Page 40 of 51

12 DFMC Open Service (OS-DFMC-DAS)

12.1.1 DFMC SBAS Augmented Signal

The SouthPAN DFMC SBAS service augments the following GNSS signals using an ionosphere-free combination in accordance with ED-259 [2] and DO-401 [3]:

- GPS L1 C/A signal defined by IS-GPS-200M [4];
- GPS L5 signal defined by IS-GPS-705H [5]; and
- Galileo E1 and E5a signals defined by OS-SIS-ICD v2.0 [6].

12.1.2 DFMC SBAS Open Service Coverage

OS-DFMC coverage is shown in Figure 1: SouthPAN Early Open Services Coverage

12.1.3 DFMC Open Service Reference Frame

OS-DFMC corrections are provided relative to WGS84 in accordance with ED-259 [2] and DO-401 [3].

12.1.4 DFMC SBAS Network Open Service (OS-DFMC-DAS)

OS-DFMC-DAS is the DFMC SBAS Open Service delivered via SouthPAN DAS. This is not a Safety-of-Life Service.

It has the following indicative performance expectation.

Table 10: OS-DFMC-DAS Performance Expectations

Performance Measure	Target
Horizontal Position Error (HPE) (95%)	≤ 1.5 metres
Vertical Position Error (VPE) (95%)	≤ 2.5 metres
Service Availability	≥ 0.995

12.1.5 DFMC SBAS Observed Performance

The DFMC-OS-DAS performance has been calculated and shown in this section for a subset of AUSCORS and PositionNZ stations depicted in Figure 8. The time period observed is the second quarter of the 2025 calendar year (1 April – 30 June 2025). Data was collected from the AUSCORS and PositionNZ reference stations and processed using SouthPAN corrections to determine a position for each second.

12.1.5.1 OS-DFMC-DAS Positional Errors

Table 11 shows the OS-DFMC-DAS horizontal and vertical error for the evaluated stations. The error has been calculated as the difference between the instantaneous calculated position and the surveyed position.

SBAS-STN-0002	D2023-53486	A5563666
Revision 02	9 April 2026	Page 41 of 51

Table 11: OS-DFMC-DAS Observed Performance – (01/04/2025 - 30/06/2025)

Location	Horizontal Error (95%) (m)	Vertical Error (95%) (m)	No. Samples
AUCK	0.92	1.74	7314575
ALBY	0.42	0.82	7323804
ALIC	0.54	1.11	7323621
BEEC	0.61	1.12	7315512
BRO1	1.03	1.68	7325264
CEDU	0.77	1.46	7207648
DARH	1.13	1.75	7331523
DUND	0.94	1.7	7316328
ERMG	0.62	1.02	6686178
EXMT	0.69	1.49	7312848
HERN	0.46	0.98	7318587
HOB2	0.44	0.79	7324785
MTMA	0.49	1.18	7331049
NTJN	0.55	1.05	7281406
TOW2	0.43	1.08	5171355
WGTN	0.64	1.44	7141508

All stations pass the performance expectations.

12.1.5.2 OS-DFMC-DAS Availability

The availability of the system has been computed as the capability of the user to compute an SBAS-aided position. This is defined as the user having at least 4 usable satellites that are visible and monitored by SouthPAN.

Figure 10 shows the availability of the service. The entire service area passes the availability requirement.

SBAS-STN-0002	D2023-53486	A5563666
Revision 02	9 April 2026	Page 42 of 51

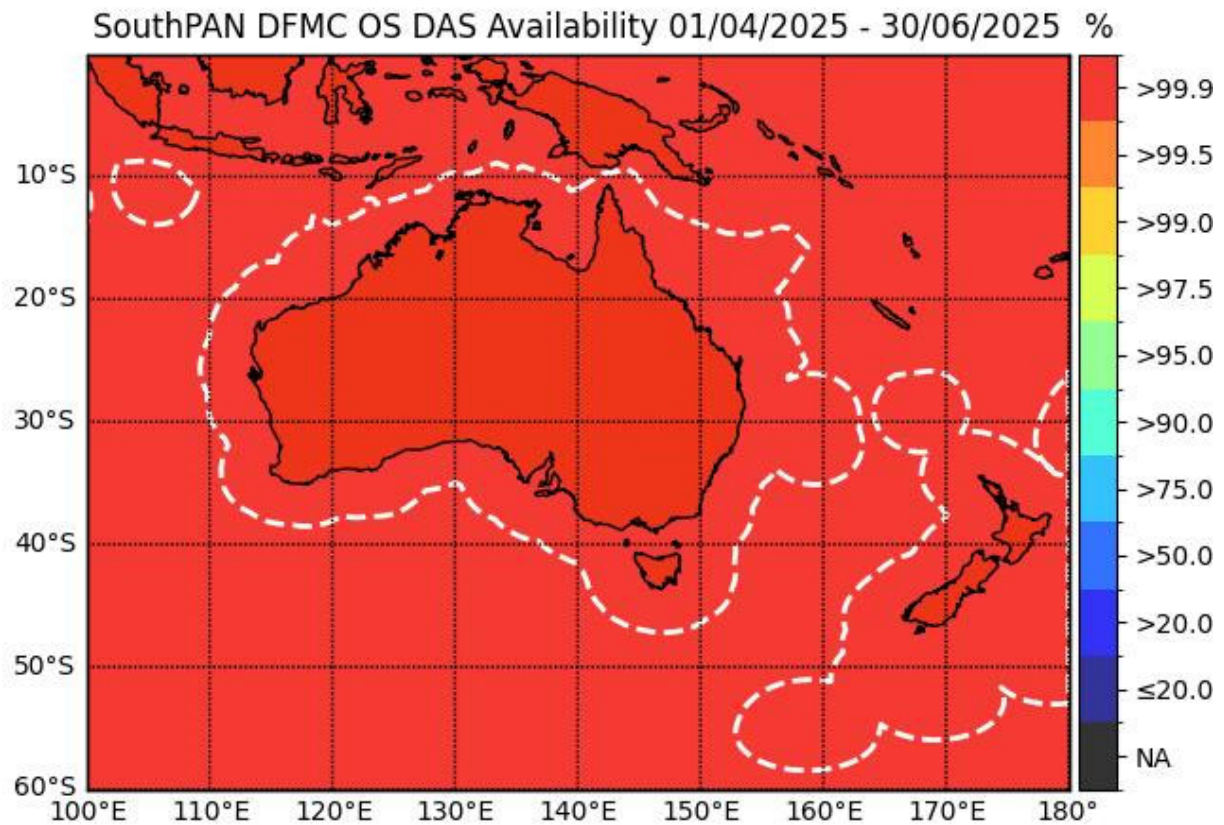


Figure 10: OS-DFMC-DAS availability (01/04/2025 - 30/06/2025). The dashed white line is the OS-DFMC service volume.

SBAS-STN-0002	D2023-53486	A5563666
Revision 02	9 April 2026	Page 43 of 51

13 PVS Open Service (OS-PVS-DAS)

13.1.1 PVS Augmented Signal

When using ED-259 [2] or DO-401 [3] to provide high accuracy corrections, the following DFMC SBAS conventions must be followed:

- For GPS, the signal augmented is the L1 LNAV navigation for the L1/L5 ionosphere-free combination as described in ED-259 [2] and DO-401 [3].
- For GAL, the signal augmented is the F/NAV navigation for the E1/E5A ionosphere-free combination as described in ED-259 [2] and DO-401 [3].

The GPS modernisation program continue to launch and commission L5-capable satellites into the constellations and is not complete at the time of writing. End Users may experience degradation of the DFMC SBAS and PVS Open Services performances as non-L5-capable GPS satellites are in-view. The regularity of this degradation will decrease as L5-capable GPS Block-III and Block-IIIF launches proceed.

13.1.2 PVS Open Service Coverage

OS-PVS coverage is shown in Figure 1: SouthPAN Early Open Services Coverage.

13.1.3 PVS Open Service Reference Frame

OS-PVS corrections are provided relative to ITRF2014 at the current epoch.

13.1.4 PVS Network Open Service (OS-PVS-DAS)

OS-PVS-DAS is the PVS Open Service delivered via SouthPAN DAS. This is not a Safety-of-Life Service.

13.1.4.1 Initial Operational Capability (IOC)

PVS is currently in IOC. It has the following indicative performance requirements:

Table 12: OS-PVS-DAS IOC Performance Requirements

Performance Measure	Target
Horizontal Position Error (HPE) (95%)	≤ 0.375 metres
Vertical Position Error (VPE) (95%)	≤ 0.525 metres
Convergence Time	≤ 80 minutes
Service Availability	≥ 0.95

13.1.4.2 Full Operational Capability (FOC)

PVS FOC is currently planned for Late 2028. FOC has the following indicative performance requirements:

SBAS-STN-0002	D2023-53486	A5563666
Revision 02	9 April 2026	Page 44 of 51

Table 13: OS-PVS-DAS FOC Performance Requirements

Performance Measure	Target
Horizontal Position Error (HPE) (95%)	≤ 0.15 metres
Vertical Position Error (VPE) (95%)	≤ 0.225 metres
Convergence Time	≤ 40 minutes
Service Availability	≥ 0.99

13.1.5 PVS Observed Performance

This section will be updated with observed performance information in future versions of this document.

SBAS-STN-0002	D2023-53486	A5563666
Revision 02	9 April 2026	Page 45 of 51

14 GRE Observables (OS-GOBS)

The OS-GOBS is the Open Service GRE Observables Service. The service provides GNSS observable data from each GRE to the Precision Service Segment via SouthPAN Interface-3. Current performance requirements for OS-GOBS are 98% total availability, 95% latency less than or equal to 1.5 seconds, and 97% latency less than or equal to 2 seconds.

To facilitate the existing services provided by GA and LINZ, the approach for OS-GOBS is for SouthPAN to implement Ntrip servers for each GRE that connect to Ntrip casters operated by GA and LINZ.

The GCC subsystem implements 210 Ntrip servers (two Ntrip server per GRE with a total of 105 GREs) that connect to two Ntrip casters in the Precision Service Segment. The two Ntrip servers for a GRE connect to two different Ntrip casters. Each Ntrip server transmits the observables from its GRE using the MSM7 message format (type 1077 for GPS and type 1097 for Galileo) that conforms to RTCM 10403.3; both message types are sent to the Ntrip caster. A full list of the sent messages are shown below in Table 14. The Ntrip servers have a distinct set of mountpoint to connect to the Ntrip caster. The Ntrip casters' password will be provided by GA/LINZ. All casters will be set to Port 2101.

Table 14: OS-GOBS Ntrip Messages

Message Type	Period	Description and Details
1013	60 s	System Parameters – reflects the first two columns of this table
1006	60 s	Antenna Reference Point location
1033	60 s	Equipment Descriptors – vendor/model/serial number
1077	1 s	GPS MSM7 – High-precision observables for GPS; carries data for L1 C/A and L5-Q signals
1097	1 s	GAL MSM7 – High-precision observables for Galileo; carries data for E1-C and E5a-Q signals
1107	1 s	SBAS MSM7 – High-precision observables for SouthPAN SGP; carries data for L1 C/A and L5 I signals
1019	30 s	GPS satellite ephemeris – Contains decoded L1 C/A ephemeris
1045	50 s	GAL F/NAV ephemeris – Contains decoded F/NAV ephemeris
1046	30 s	GAL I/NAV ephemeris – Contains decoded I/NAV ephemeris

SBAS-STN-0002	D2023-53486	A5563666
Revision 02	9 April 2026	Page 46 of 51

15 SouthPAN End User receivers

SouthPAN is not currently certified for Safety-of-Life applications. DAS also does not support Safety-of-Life applications.

If your device conforms to DO-229F [1]—including processing functionality of the message types described in Section 10 then it should meet the requirements for using SouthPAN Data Access Services and be able to achieve the performance described in Section 11.

The minimum requirement for using SouthPAN's L1 SBAS DAS is by implementing the DO-229F [1] navigation weighted solution and message processing.

Safety-of-Life End-User receivers may receive the SouthPAN L1 SBAS signal on PRN 122 but will ignore the SBAS messages due to the existence of Message Type 0 (MT0). Safety-of-Life End-User receivers are those that are certified to Federal Aviation Administration (FAA) Technical Standing Order TSO-C145 or -C146, and their equivalents published by the European Union Aviation Safety Agency (EASA) ((E)TSO-C145/-C146).

SBAS-STN-0002	D2023-53486	A5563666
Revision 02	9 April 2026	Page 47 of 51

Appendix A SINCA Description

A.1 SINCA Compression Algorithm

The SISNeT Compression Algorithm (SINCA) is a straightforward technique employed by the DS to enhance communication speed during the crucial task of transmitting SouthPAN DAS messages. By utilizing the SINCA algorithm, the message length is reduced. You can find a visual representation of the SINCA compression algorithm in Figure 11.

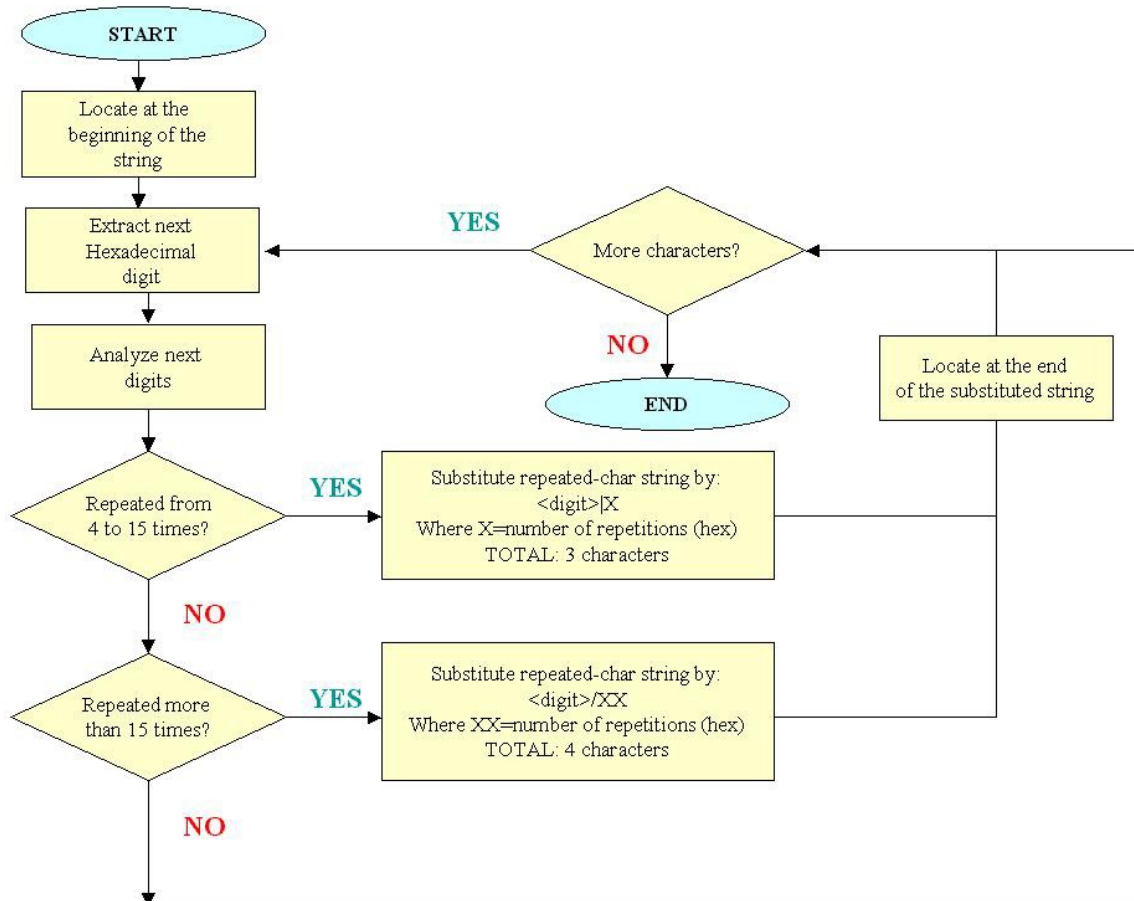


Figure 11: SINCA Compression Algorithm

The SINCA compression process involves evaluating each digit within the hexadecimal string. If a digit is repeated between 4 and 15 times, all the repetitions are replaced with the format:

<repeated_digit>|X

Where 'X' represents a hexadecimal digit indicating the number of repetitions. For example, if the substring is found to be:

AAAAAAAAAAAA

It is compressed to:

A|C

SBAS-STN-0002	D2023-53486	A5563666
Revision 02	9 April 2026	Page 48 of 51

Since 'A' is repeated 12 times. Only one digit is used to represent the number of repetitions, allowing a maximum of 15 repetitions. A minimum of 4 repetitions is set as a threshold since the compressed string always consists of three characters. Without this threshold, no compression would be achieved.

If a digit is repeated more than 15 times, the compression method remains the same, but the number of repetitions is indicated using two digits, and a '/' separator is employed:

<repeated_digit>/XX

The reason for using a different separator is to facilitate the decompression process. The '|' character indicates to read only the next character, while the '/' character signifies reading the next two characters.

As depicted in Figure 12, SINCA compression can significantly reduce the length of a SouthPAN message, decreasing it from 68 characters to only 46 characters or even less. This represents a compression rate of 67.6% compared to the original size.

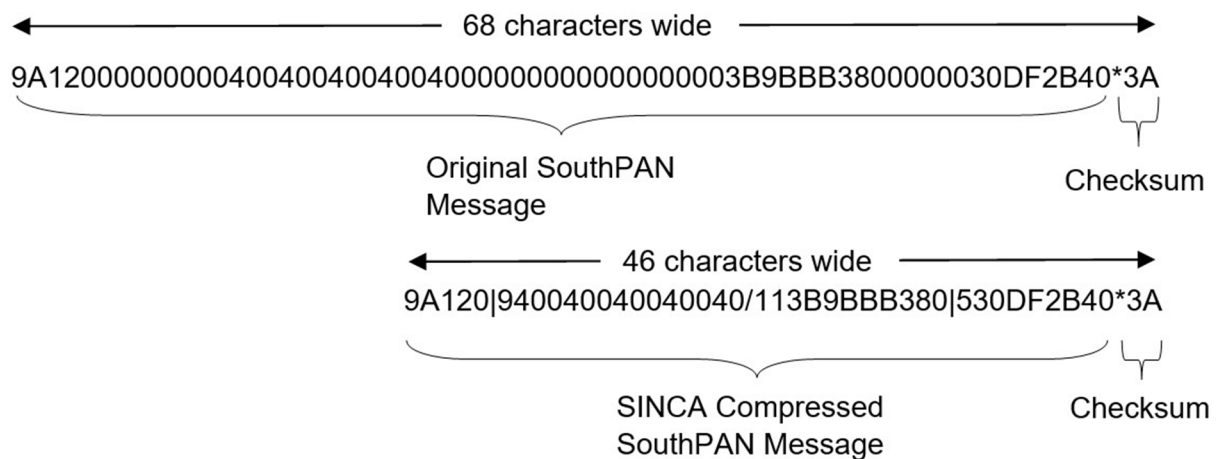


Figure 12: Example of SINCA Compression

A.2 SINCA Decompression Algorithm

Figure 13 provides an illustration of how to implement the decompression algorithm. The process involves assessing each character within the compressed string. When an 'X|Y' string is encountered, it is replaced with 'XX...X', where 'X' is repeated Y times (with Y being a hexadecimal digit). When a 'X/YY' string is encountered, it is replaced with 'XX...X', where 'X' is repeated YY times (with YY being a two-digit hexadecimal number). The algorithm continues until it reaches the end of the compressed string.

SBAS-STN-0002	D2023-53486	A5563666
Revision 02	9 April 2026	Page 49 of 51

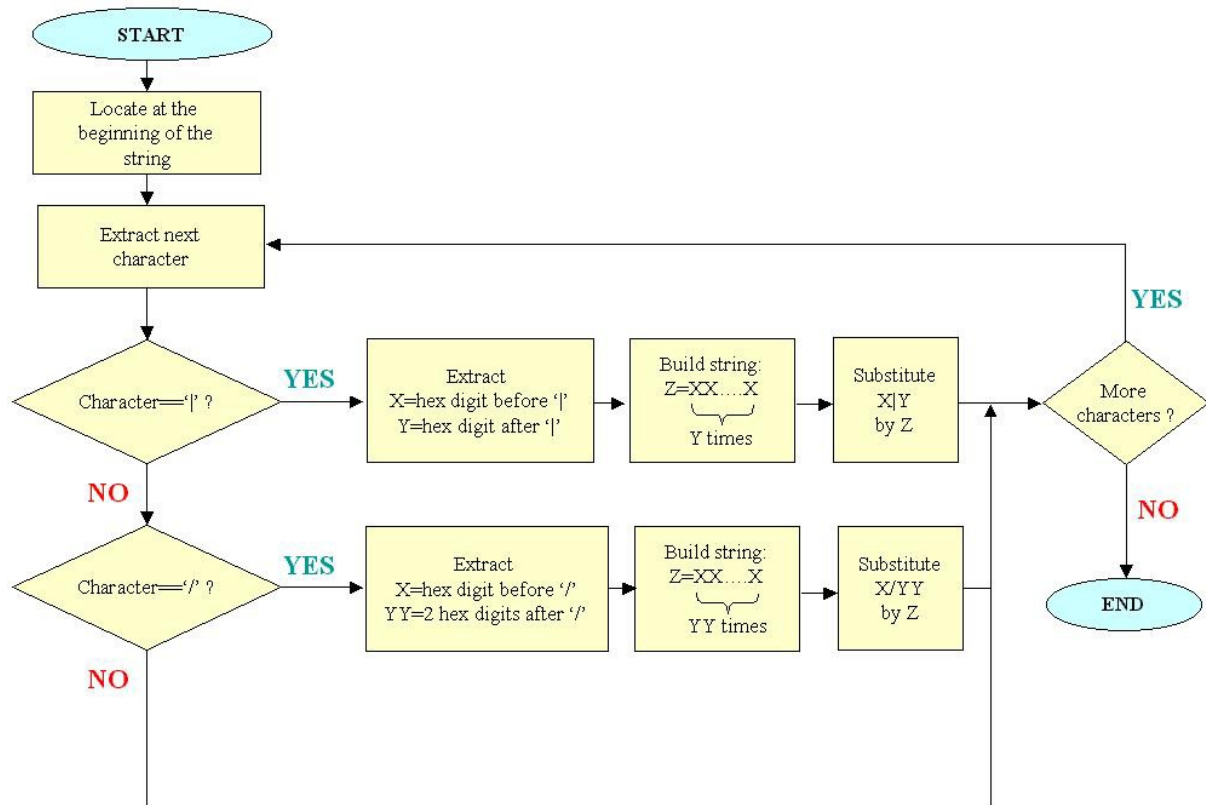


Figure 13: SINCA Decompression Algorithm

Figure 14 shows an example of SINCA decompression. The original string was 46 characters in width. However, after decompression, the resulting string extends to 68 characters, making it 1.48 times longer than the compressed version.

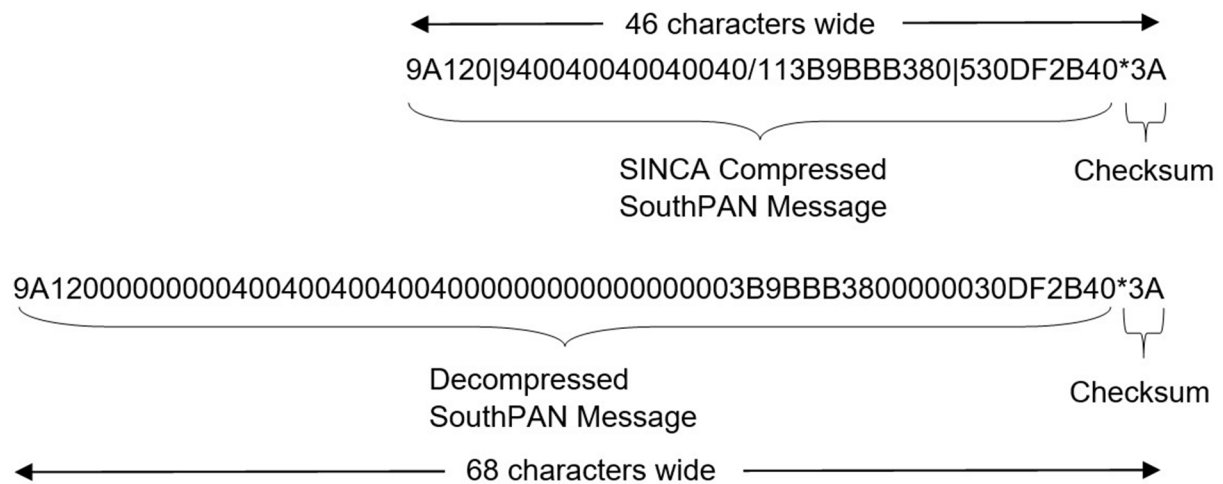


Figure 14: Example of SINCA Decompression

SBAS-STN-0002	D2023-53486	A5563666
Revision 02	9 April 2026	Page 50 of 51

End of document

SBAS-STN-0002	D2023-53486	A5563666
Revision 02	9 April 2026	Page 51 of 51